





aselsansivas

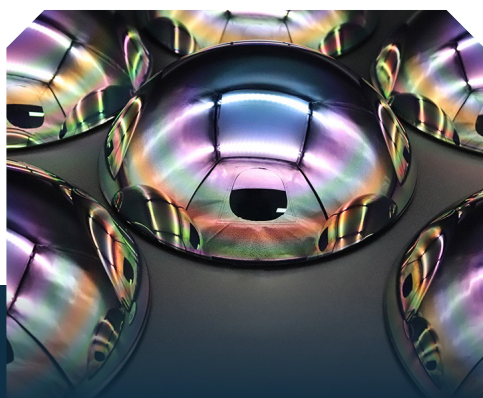

OPTICAL PRODUCTS CATALOGUE

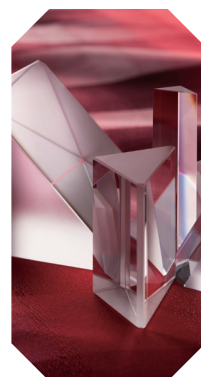


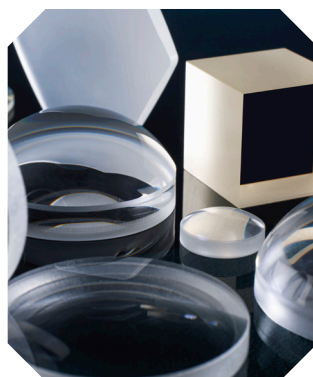

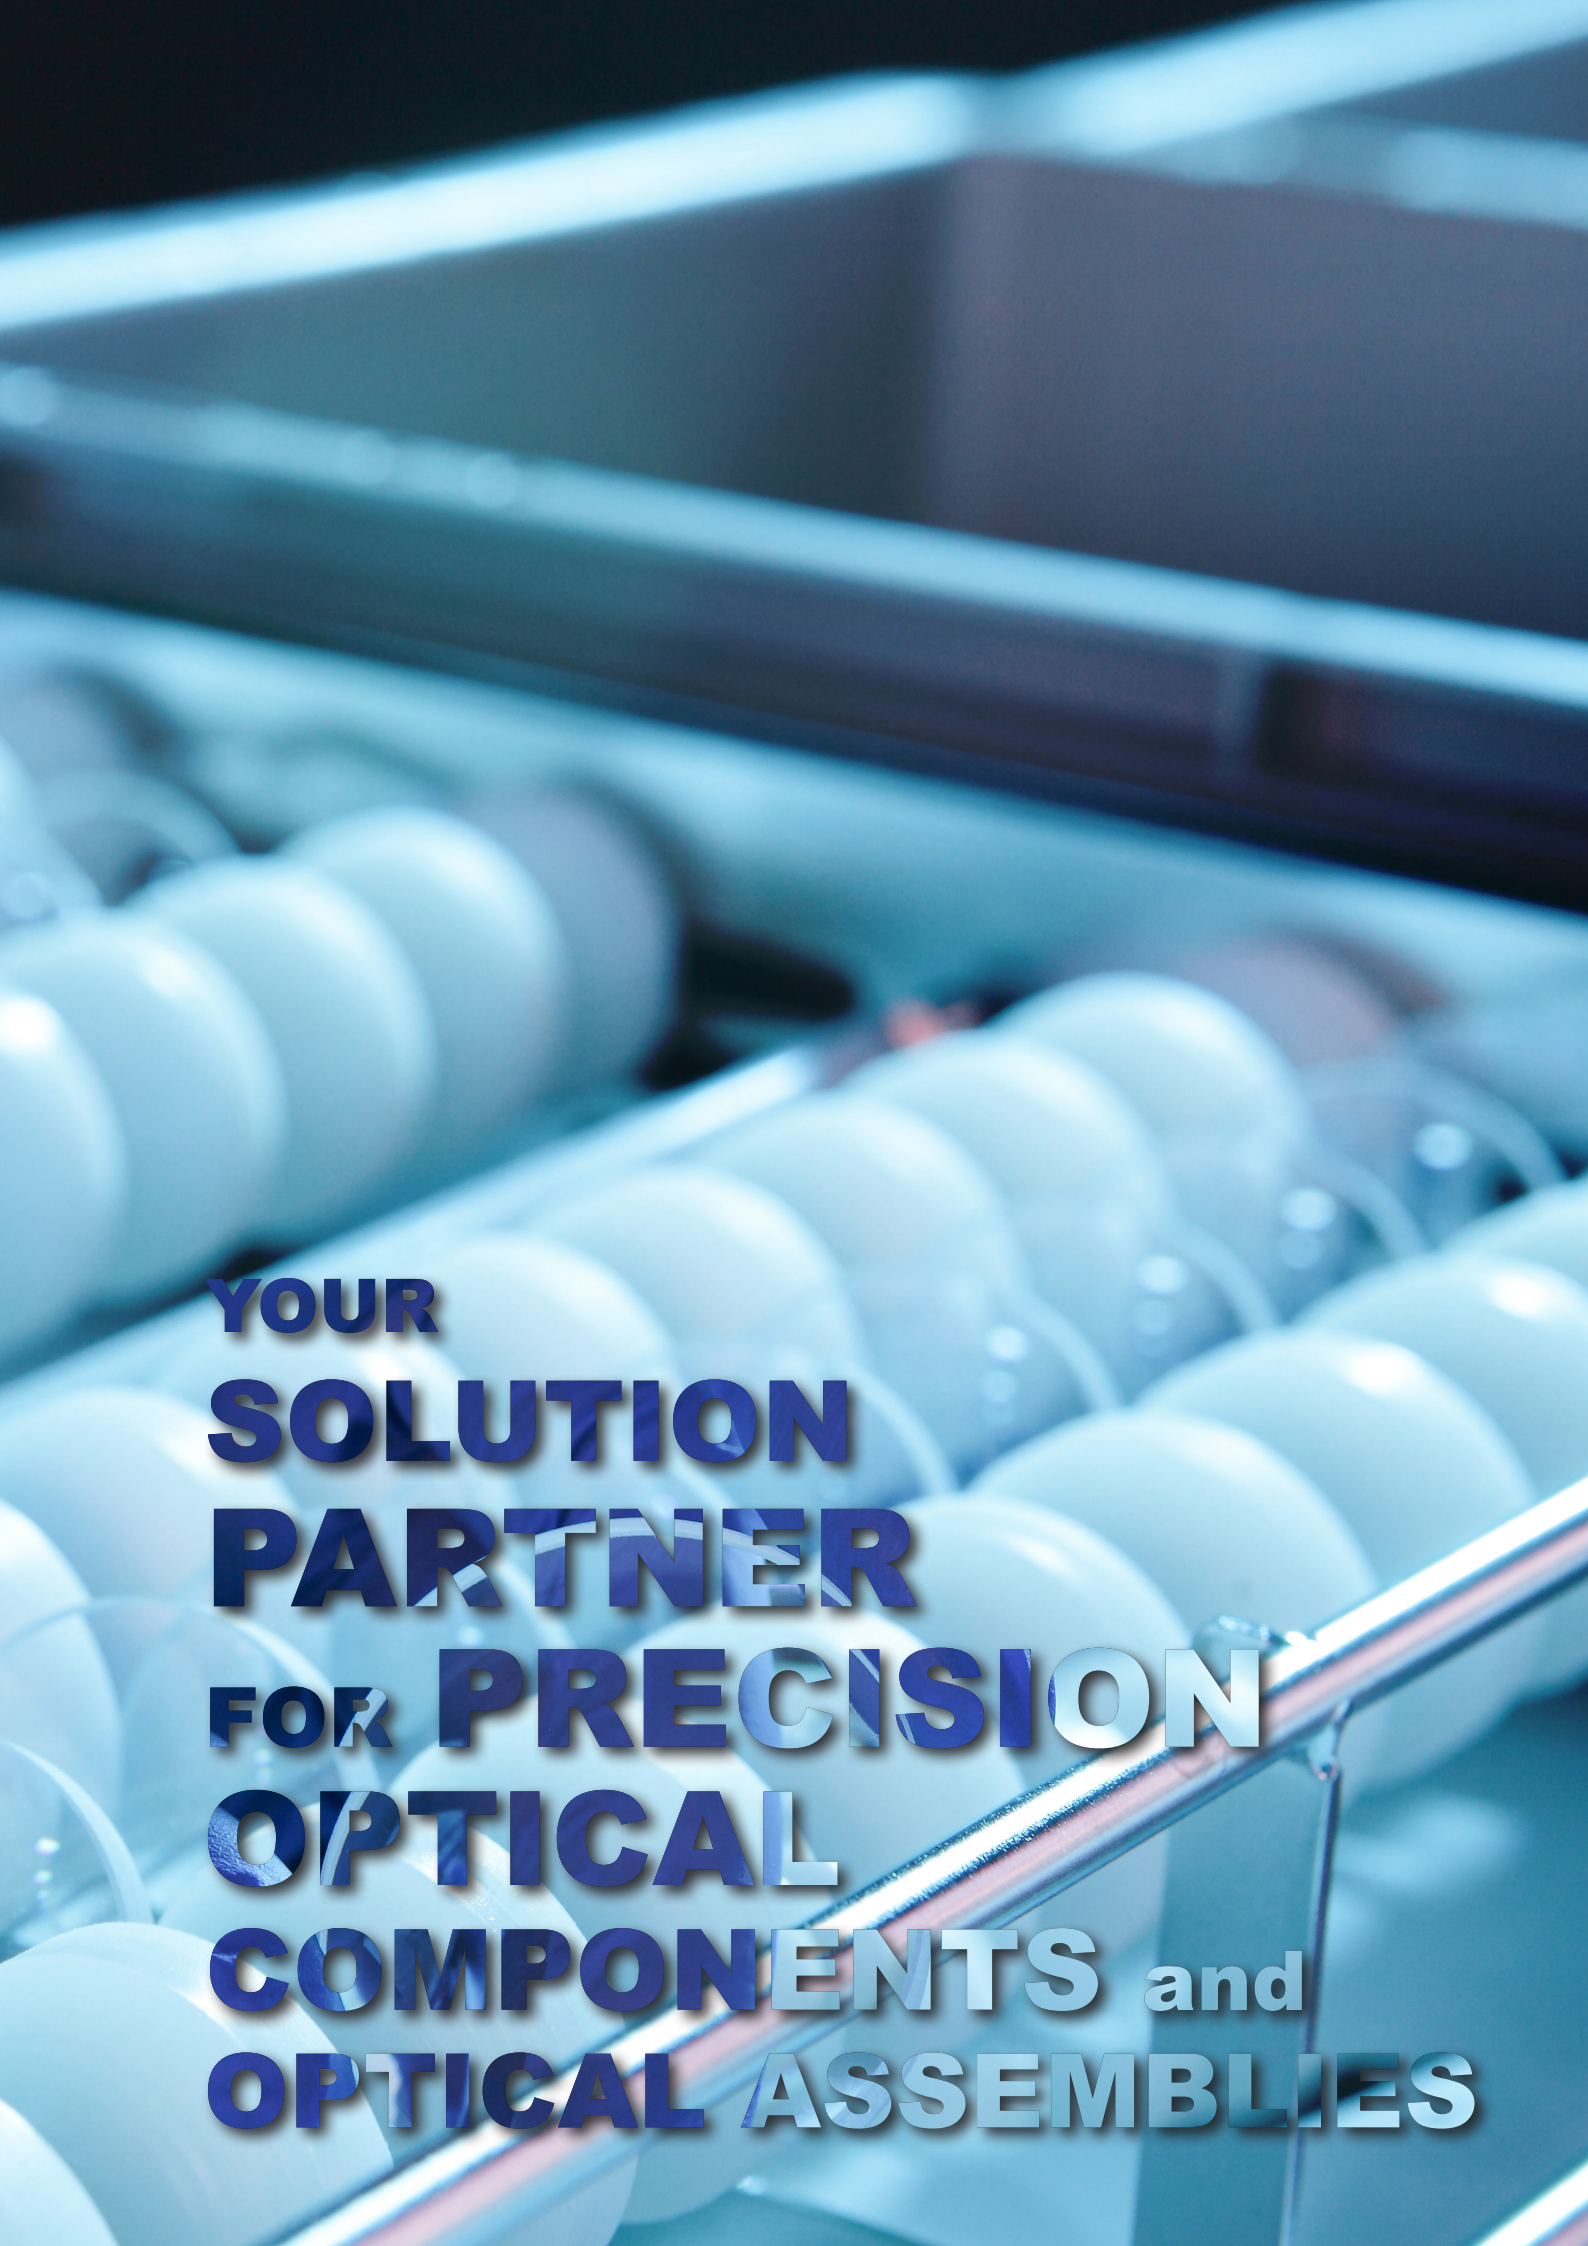

**YOUR
SOLUTION
PARTNER
FOR PRECISION
OPTICAL
COMPONENTS and
OPTICAL ASSEMBLIES**

ABOUT US

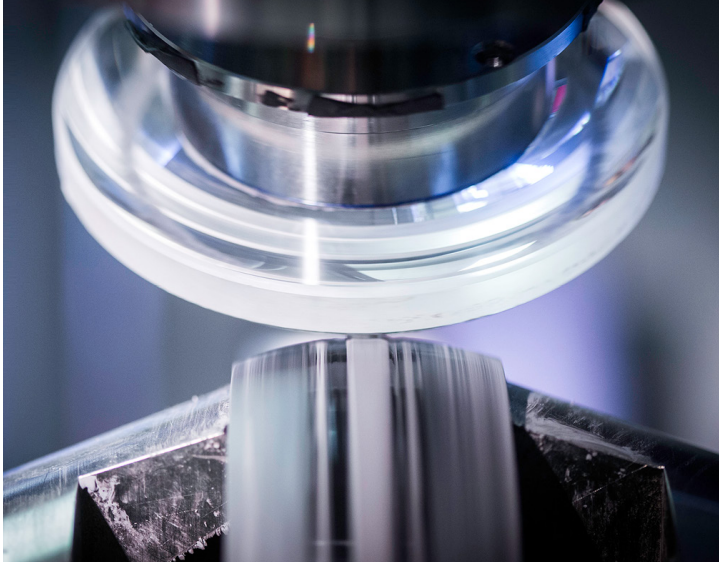



aselsansivas

ASELSAN Sivas, which was established with the partnership of ASELSAN and Sivas Optik Malzemeleri A.Ş., started its activities on May 28, 2016 in order to produce domestic and national optical products used in our country's defense industry and imported optical products. ASELSAN Sivas has become a leading company that mass-produces 50 different items of electro-optical devices, including rifle-mounted day vision scopes, pistol reflex sights, holographic sights, armored vehicle periscopes, night vision scopes and thermal weapon scopes, as well as optical components and assemblies.

Taking firm steps towards the goal of eliminating Turkey's foreign dependency in the production of electro-optical devices and lenses with the slogan 'National Eye of the Defense Industry', ASELSAN Sivas has developed critical technologies such as Optical Lithography, Laser Optics production and Band pass filter production, and has nationalized more than 300 optical units,

Since its establishment, ASELSAN Sivas has successfully delivered a total of 60 thousand infantry day vision scopes, 30 thousand night vision scopes, 40 thousand reflex sights and 2 thousand sniper scopes for the Turkish Armed Forces and security units. ASELSAN has also produced nearly 2,500 very sensitive continuous focus thermal camera lenses. ASELSAN also has an annual production capacity of 200,000 units and has produced 1.3 million optical components since its establishment.

CAPABILITIES

GRINDING




The manufacture of precision optics requires multiple grinding steps.

Aselsan Sivas's grinding machines can be equipped with different spindle configurations to support the customer specific process flow. Aselsan Sivas's spindle systems range from mechanical to air bearing based systems utilizing different spindle speeds.

Modular kinematics and computer supported setup make it possible to manufacture the whole spectrum, from flat surfaces and spheres to complex aspherical lenses. Plano grinding machines are used for the production of windows, filters, prisms and periscope prisms. We use ultrasonic grinding device for drilling and discharging of materials such as zirconium.

POLISHING

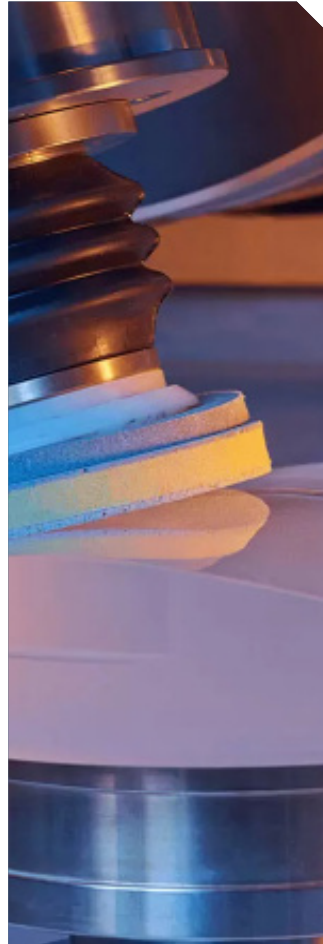

Optical polishing is a widely adopted manufacturing technique for the production process of high precision optical components where minimum defect and roughness values are demanded.

In the polishing process, we can make all optical surfaces with CNC/NC polishing devices. The polishing of the surfaces of high precision optical components with the desired $\lambda/10$ precision is carried out with MRF (Magneto-Rheological Finishing) device.

CENTERING



Aselsan Sivas's centering machines are characterized by high process flexibility with a wide working range from 5 to 300 mm.

Spherical lenses can be clamped using Aselsan Sivas's well established bell clamping technology allowing precise positioning without harming the lens.

Based on an intelligent automated lens positioning system featuring a precise, integrated measuring laser, superior centering results can be achieved for aspherical lenses.

OPTICAL THIN FILM COATING



Thin film optical coatings are applied to optical substrates such as glass to alter or change its optical properties. The coating is applied in extremely thin layers to the surface and the number of coatings and the thickness of the coating is done to effect a specific wavelength of the light.

Thin Film Optical Coatings from Aselsan Sivas are applied by electron beam and ion-assisted electron beam deposition influencing and controlling reflectance, transmittance, absorbance and resistance.

SINGLE POINT DIAMOND TURNING



Aselsan Sivas utilizes Diamond Turning to produce a wide range of high precision optical components. Single Point Diamond Turning is a manufacturing technique for producing off-axis parabolic (OAP) mirrors, off-axis elliptical (OAE) mirrors, and other precision metal optical components.

Off-axis focusing mirrors are aberration-free across a broadband wavelength range, making them ideal for use in instrumentation and laser systems including MTF, FLIR, and FTIR, along with IR lasers such as Quantum cascade lasers.

Materials such as germanium, silicon, zinc selenide used in the IR region are processed.

PLASTIC INJECTION METHOD POLYCARBONATE LENS



The use of precision polymer optics is becoming an increasing necessity today as products demand sophisticated light handling components to achieve desired results.

The best outcomes are achieved when the design team (usually made up of optical and mechanical designers) understands the manufacturing process and works closely with a manufacturer who specializes in this field.

Key advantages that polymer optics have over competing glass solutions include lighter weight; the ability to integrate mechanical and optical features; and the ability to reproduce aspheric, freeform, and other complex geometric surfaces.

CAPABILITIES

LITHOGRAPHY



The objective of Photolithography is to create small structures or features on a silicon wafer or glass using a photoresist (thin photosensitive polymer film). By etching with UV light, features are made out of photoresist.

Photolithography is a patterning process in which a photosensitive polymer is selectively exposed to light through a mask, leaving a latent image in the polymer that can then be selectively dissolved to provide patterned access to an underlying substrate.

BONDING & ALIGNMENT




Bonding and alignment process is applied with the help of precision alignment devices.

During the process : Precision Suitable diameters and radius is determined. The surfaces to be glued are cleaned with the help of alcohol and acetone.

UV adhesive is applied to the appropriate surfaces and transferred to the device. Fixtures and setups suitable for the project are prepared in the fast doublet device. The optical centers of the two lenses are found and the UV adhesive is cured.


OPTICAL MEASUREMENT

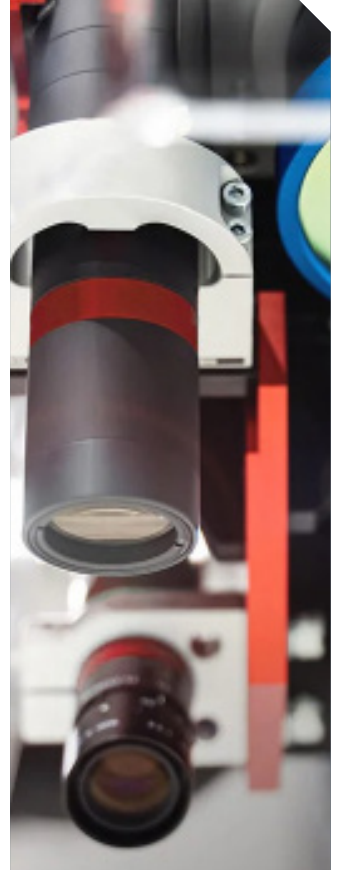

All optical units produced by Aselsan Sivas are 100% measured with precision measurement devices.

In contrast to tactile measurement technology, optical measurement processes use light for contact-free measurement of the test object's properties. This technology makes use of the physical principles of absorption and reflection to capture the properties of whole surfaces and not just individual measuring points.

**MAGNETO RHEOLOGICAL
FINISHING (MRF)**

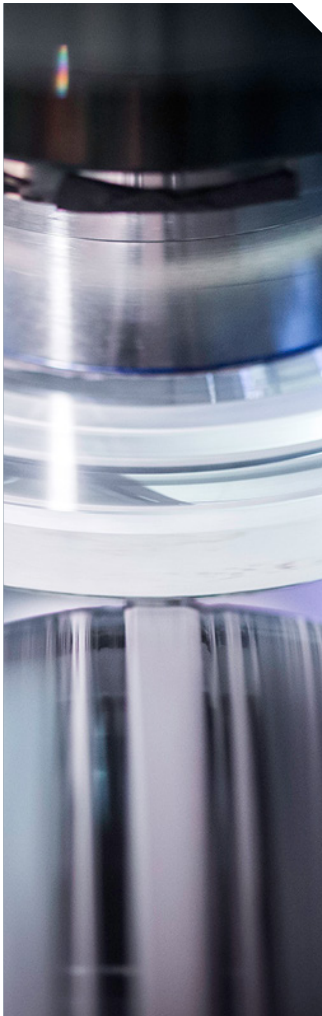

Magnetorheological finishing (MRF) is a patented deterministic lens surface finishing process that improves the form finish of precision optical components.


This technique enables us to control optical polishing with a greater degree of precision than conventional lap polishing. These complement existing polishing capabilities for surface correction when enhanced precision is required to produce complex optics.

OTHER CAPABILITIES



- Processing up to 5mm-500mm diameter,
- Window, filter and prism production,
- Spherical and aspherical visible zone lens production,
- Spherical, aspherical, diffractive, plano and free from infrared zone production,
- Production of polycarbonate lenses by plastic injection method
- Ultraviolet (UV), visible (VIS) and infrared (IR) AR, HR, band pass filter, short pass filter and long pass filter can be produced.
- DLC Optical coating produced.
- Laser optical thin film coatings are produced.
- Highly capable metrology systems.
- We have all kinds of Optical Glasses, Sapphire, Fused Silica,
- Colored Filter Glass, Germanium, Silicon, ZnSe, ZnS, CaF2 Chalcogenide Glasses, Aluminium, fused silica, zerodur processing capability.

VELA OPTICS

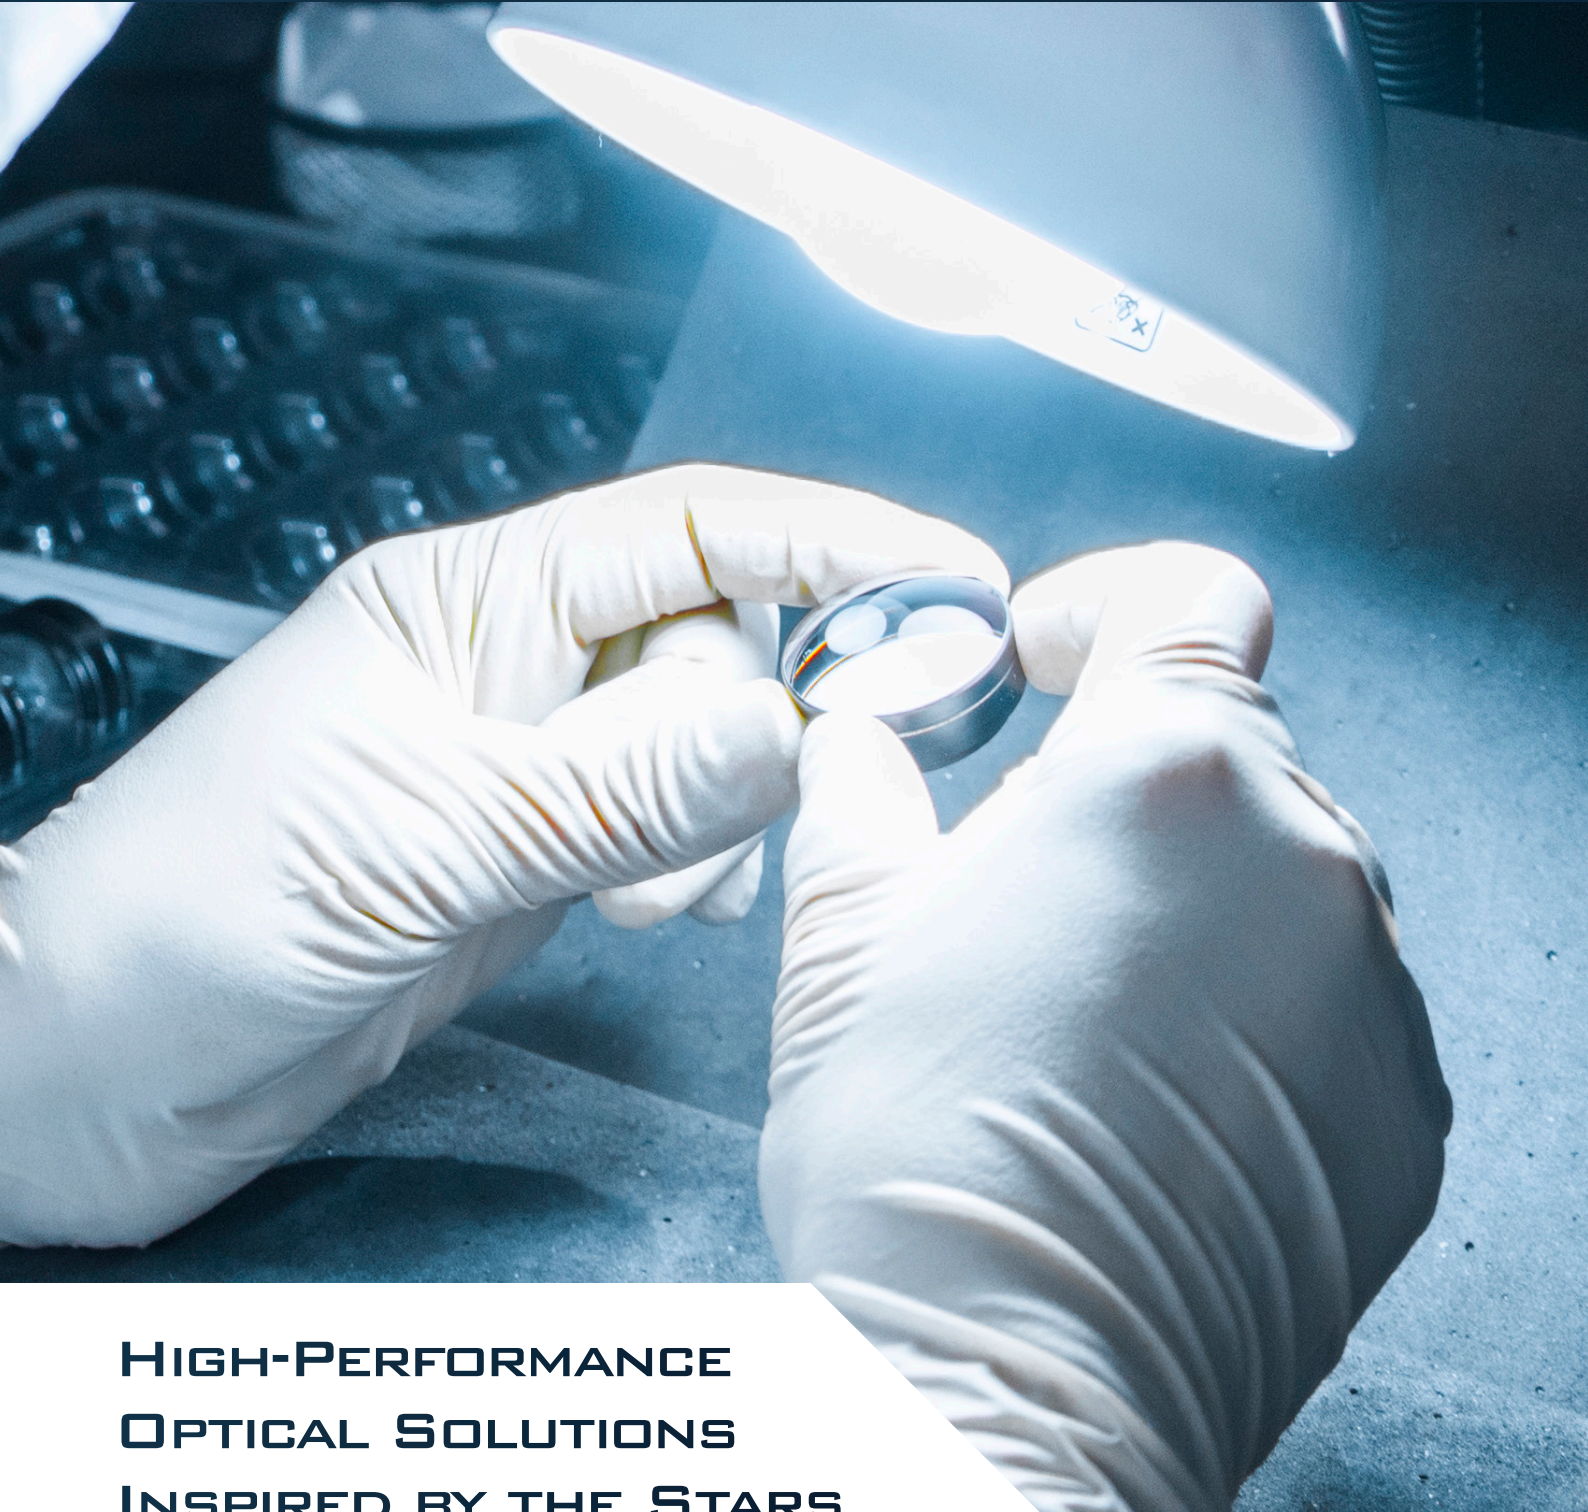

HIGH-PERFORMANCE OPTICAL SOLUTIONS INSPIRED BY THE STARS

As ASELSAN Sivas, we have restructured our optical technologies portfolio under two distinct product families to present our capabilities with greater clarity and strategic focus: Vela Optics and Tauri Optics.

The names of these product families are derived from well-known constellations, symbolizing our commitment to precision, innovation, and scientific excellence. These celestial references reflect our vision of turning inspiration from the skies into advanced technologies on the ground.

www.aselsansivas.com

PRECISION IN THE VISIBLE SPECTRUM

Vela, meaning “sail” in Latin, takes its name from the Vela constellation located in the Southern Hemisphere. Historically used for navigation, Vela symbolizes clarity, direction, and accuracy — values that define the Vela Optics product line.

Vela Optics includes systems designed to operate within the visible light spectrum. Key product offerings include:

- High-resolution optical binocular systems
- Daylight vision sights
- Precision optical lenses for defense and industrial applications

Vela Optics provides sharp, high-precision imaging solutions for daylight operations and demanding visual environments.



Vela Optics and Tauri Optics represent the engineering expertise and innovation capacity of ASELSAN Sivas. Inspired by the stars, we deliver high-performance, mission-ready optical solutions that meet the evolving needs of defense and industrial users.


At ASELSAN Sivas, we remain committed to providing reliable, user-focused technologies — designed to perform under any condition.

VELA OPTICS

VELA OPTICS PRODUCT CODE

The Vela Optics product family is structured into subcategories aligned with the specific production and processing requirements of each product group.

Product Family	Surface Form Combination
V101	Spherical-Spherical
V102	Spherical-Aspherical
V103	Spherical-Plano
V104	Aspherical-Plano
V105	Plano-Plano
V106	Single Surface Mirror

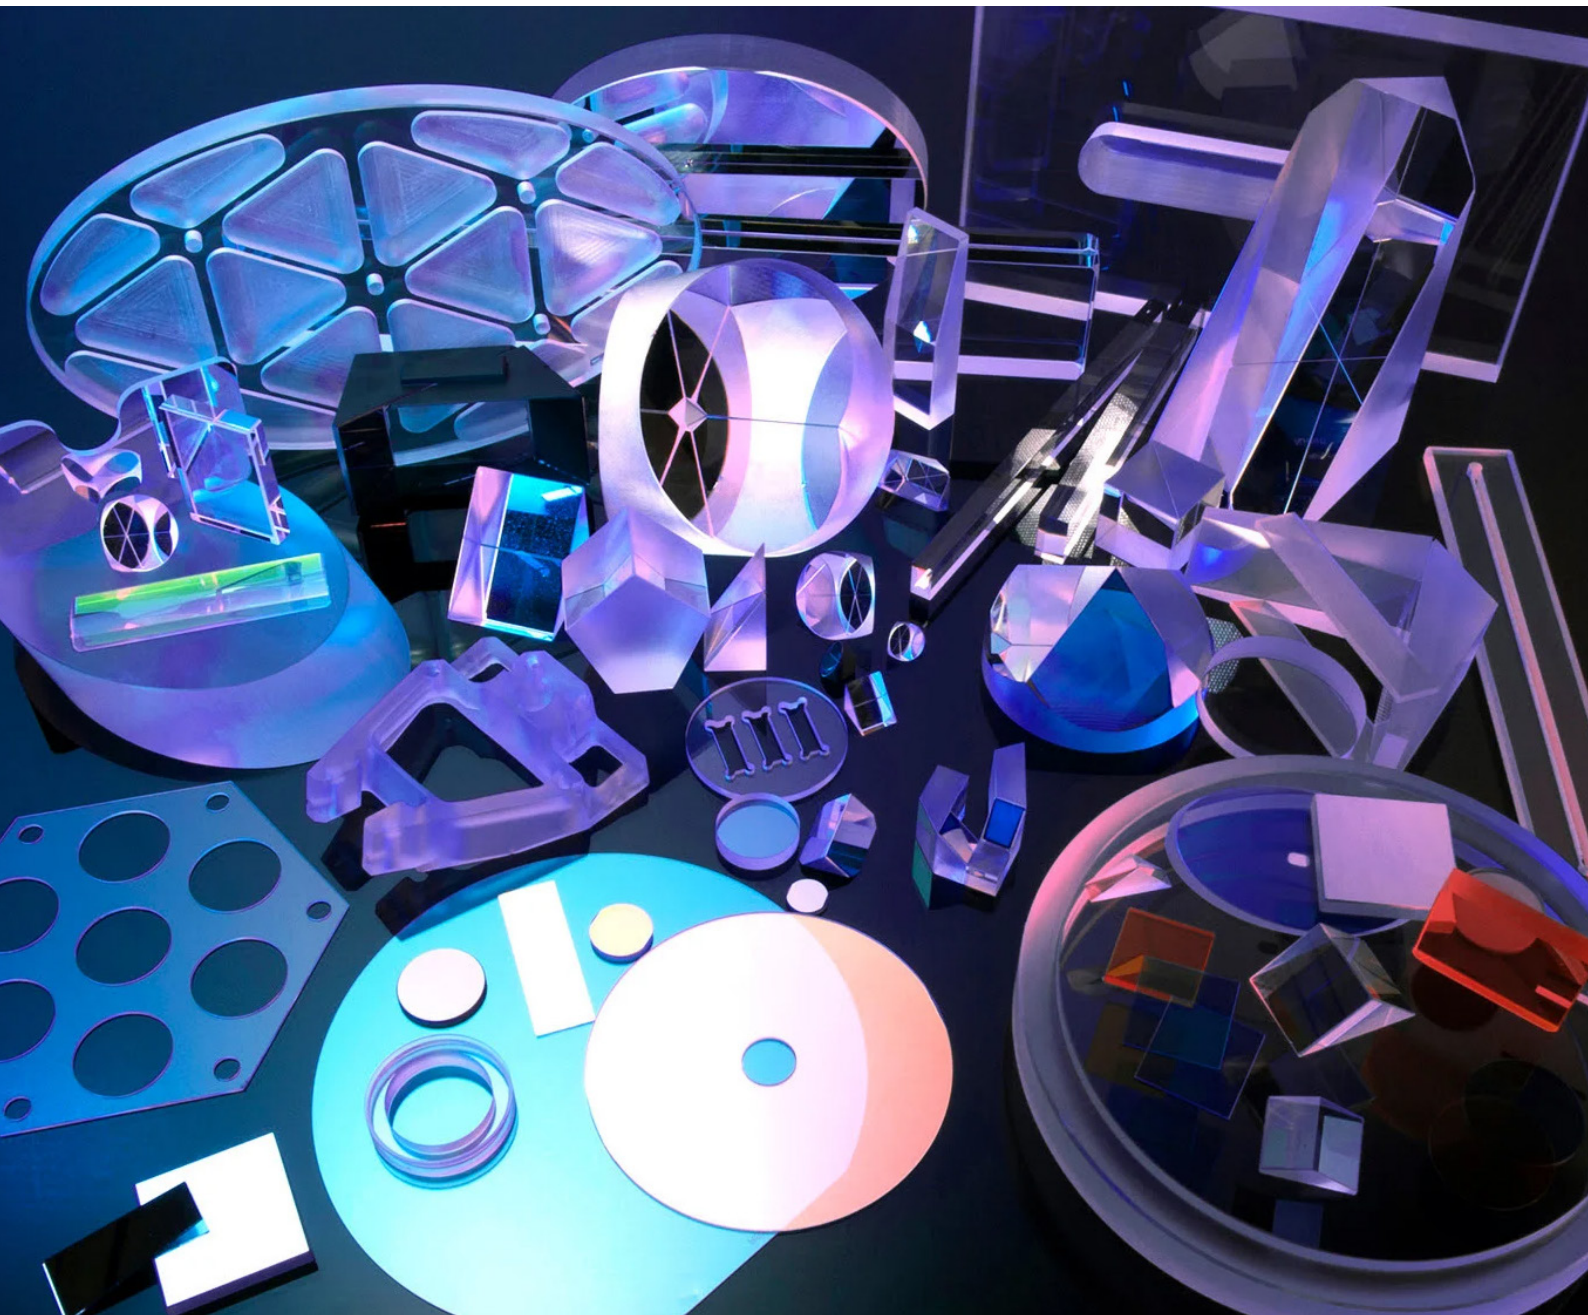

SPHERICAL CAPABILITY

Quality	High Precision
Diameter Tolerance	+/- 0.01 mm
CT Tolerance	+/- 0.02 mm
Power	0.5 fr
Irregularity (PV)	0.15 μ m
Surface Roughness (Rq)	10 nm
Scratch-Dig	10-5
Diameter	5 - 140 mm
Radius	5 - 7000 mm


ASPHERICAL CAPABILITY

Quality	High Precision
Diameter Tolerance	+/- 0.01 mm
CT Tolerance	+/- 0.02 mm
Power	2 fr
Irregularity (PV)	3.00 μ m
Surface Roughness (Rq)	10 nm
Scratch-Dig	10-5
Diameter	5 - 140 mm

PLANO CAPABILITY

Quality	High Precision
Diameter Tolerance	+/- 0.01 mm
CT Tolerance	+/- 0.02 mm
Power	0.5 fr
Irregularity (PV)	0.25 μ m
Surface Roughness (Rq)	10 nm
Scratch-Dig	10-5
Diameter	5 - 200 mm
Paralellism	1'

TAURI OPTICS

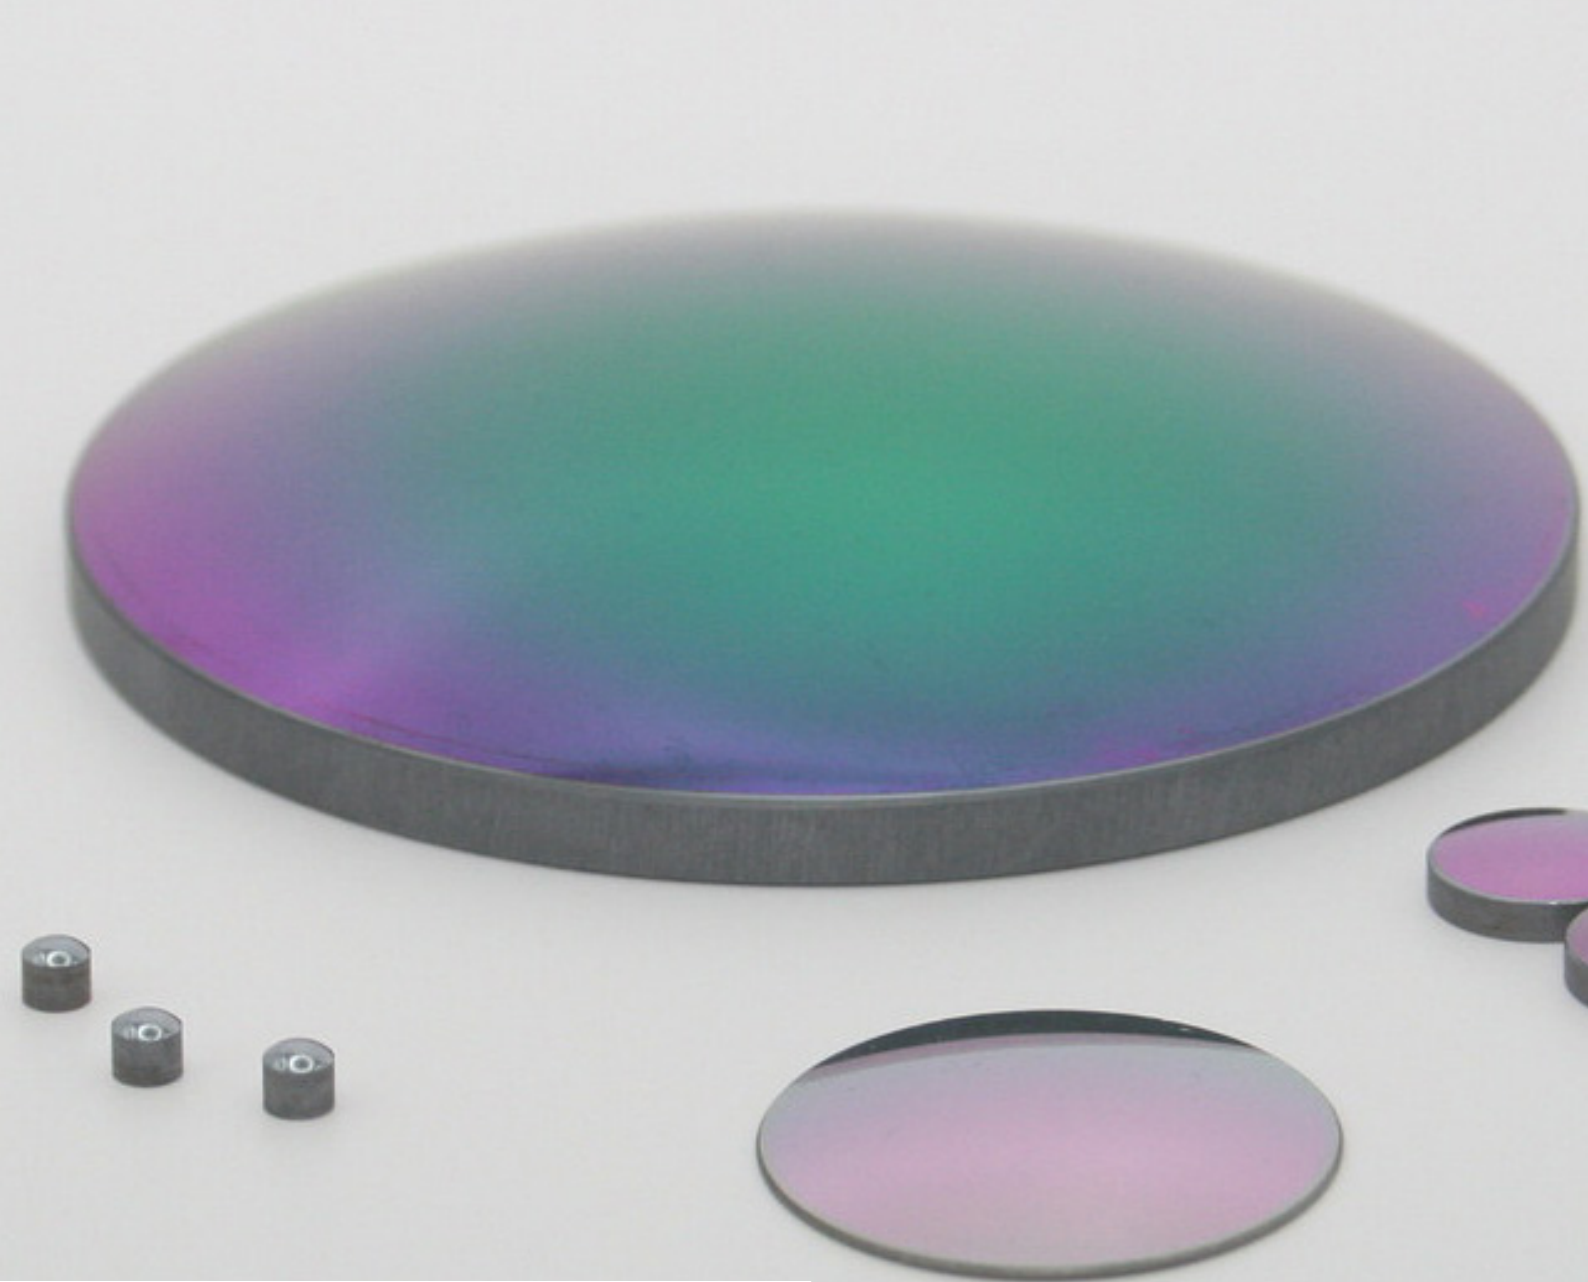

HIGH-PERFORMANCE OPTICAL SOLUTIONS INSPIRED BY THE STARS

As ASELSAN Sivas, we have restructured our optical technologies portfolio under two distinct product families to present our capabilities with greater clarity and strategic focus: Vela Optics and Tauri Optics.

The names of these product families are derived from well-known constellations, symbolizing our commitment to precision, innovation, and scientific excellence. These celestial references reflect our vision of turning inspiration from the skies into advanced technologies on the ground.

www.aselsansivas.com


SEEING BEYOND THE VISIBLE

Tauri is inspired by the Taurus constellation, home to Aldebaran, one of the brightest stars in the night sky. Representing strength, endurance, and determination, the name Tauri reflects the robust capabilities of this advanced product family.

Tauri Optics focuses on infrared (IR) and thermal imaging technologies. Designed for low-light, night-time, and adverse weather conditions, the product range includes:

- Thermal binocular systems
- Infrared (IR) camera solutions
- Thermal imaging sights and targeting systems
- Advanced thermal sensors and detector modules

Tauri Optics enables users to maintain full situational awareness even in complete darkness or visually degraded environments.

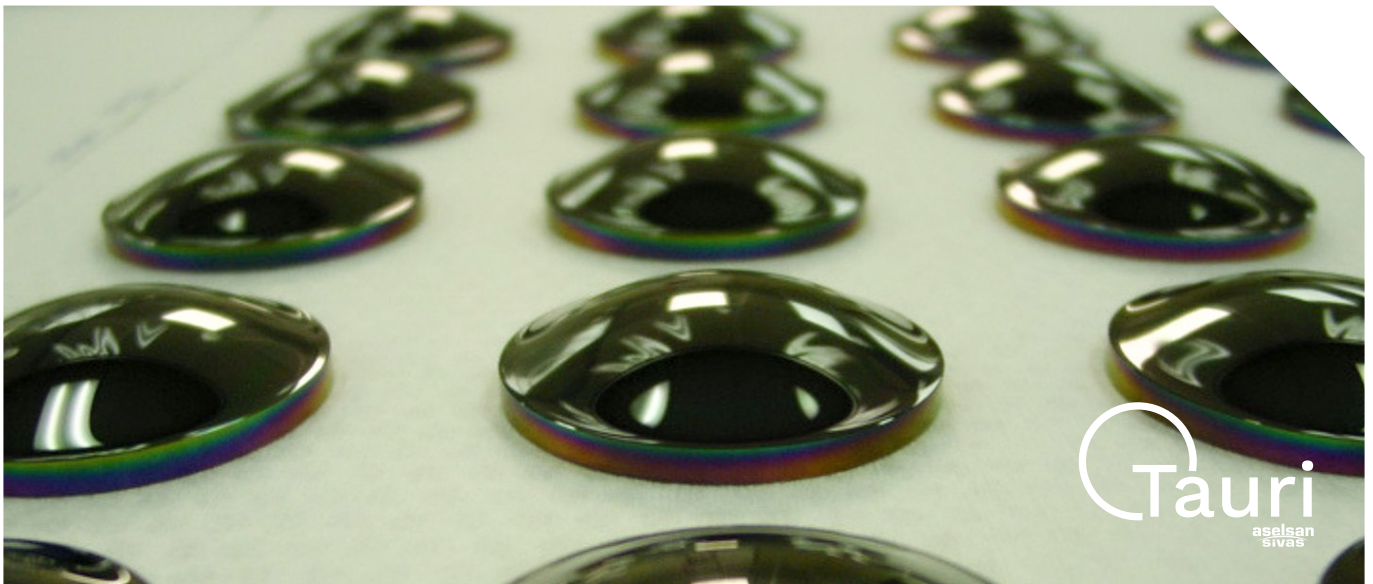

Vela Optics and Tauri Optics represent the engineering expertise and innovation capacity of ASELSAN Sivas. Inspired by the stars, we deliver high-performance, mission-ready optical solutions that meet the evolving needs of defense and industrial users.


At ASELSAN Sivas, we remain committed to providing reliable, user-focused technologies — designed to perform under any condition.

TAURI OPTICS

TAURI OPTICS PRODUCT CODE

The Tauri Optics product family is structured into subcategories aligned with the specific production and processing requirements of each product group.

Product Family	Surface Form Combination
T101	Spherical-Spherical
T102	Spherical-Aspherical
T103	Spherical-Plano
T104	Aspherical-Plano
T105	Plano-Plano
T106	Diffraction-Spherical
T107	Diffraction-Plano
T108	Single Surface Mirror
T109	Spherical-Freeform
T110	Plano-Freeform

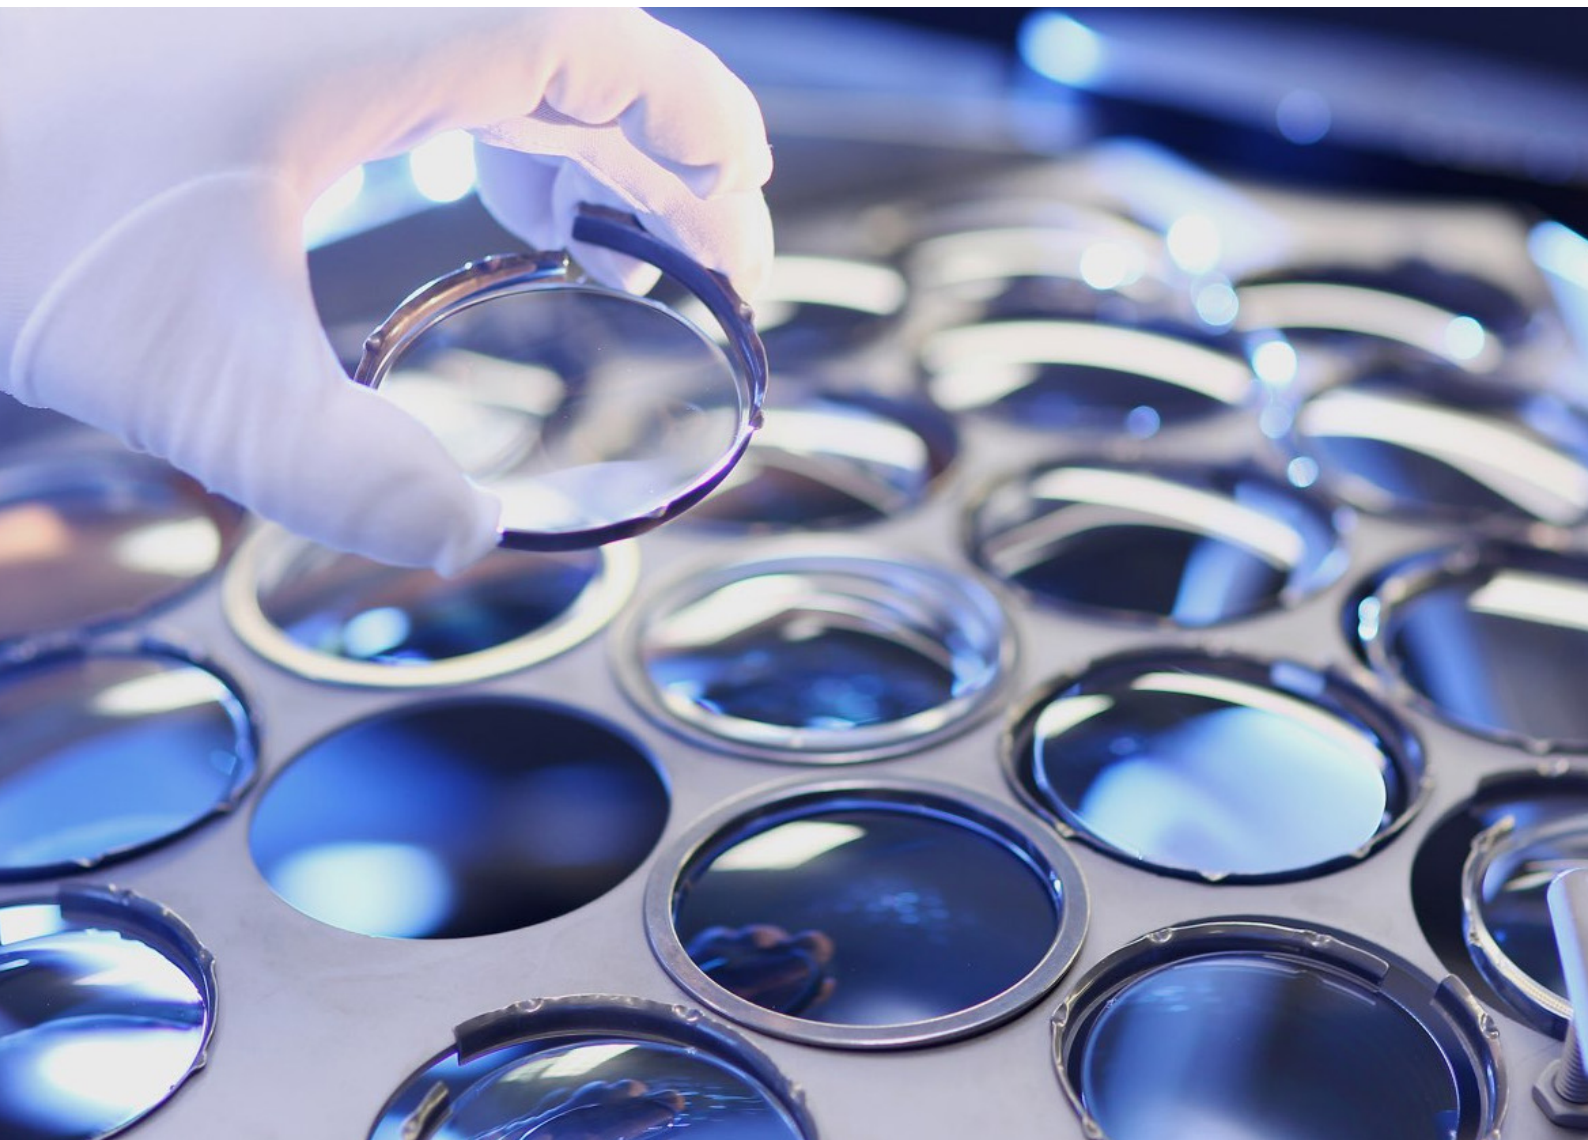

SPHERICAL CAPABILITY

Quality	High Precision
Diameter Tolerance	+/- 0.01 mm
CT Tolerance	+/- 0.02 mm
Power	0.5 fr
Irregularity (PV)	0.5 fr
Surface Roughness (Rq)	10 nm
Scratch-Dig	10-5
Diameter	5 - 400 mm
Radius	5 - 7000 mm

ASPHERICAL CAPABILITY

Quality	High Precision
Diameter Tolerance	+/- 0.01 mm
CT Tolerance	+/- 0.02 mm
Power	0.5 fr
Irregularity (PV)	0.5 fr
Surface Roughness (Rq)	10 nm
Scratch-Dig	10-5
Diameter	5 - 400 mm

PLANO CAPABILITY

Quality	High Precision
Diameter Tolerance	+/- 0.01 mm
CT Tolerance	+/- 0.02 mm
Power	0.5 fr
Irregularity (PV)	0.5 fr
Surface Roughness (Rq)	10 nm
Scratch-Dig	10-5
Diameter	5 - 400 mm
Paralellism	1'

DIFRACTIVE CAPABILITY

Quality	High Precision
Diameter Tolerance	+/- 0.01 mm
CT Tolerance	+/- 0.02 mm
Power	0.5 fr
Irregularity (PV)	0.5 fr
Surface Roughness (Rq)	10 nm
Scratch-Dig	10-5
Diameter	5 - 400 mm

REFORM CAPABILITY

Quality	High Precision
Diameter Tolerance	+/- 0.01 mm
CT Tolerance	+/- 0.02 mm
Power	1 fr
Irregularity (PV)	1 fr
Surface Roughness (Rq)	10 nm
Scratch-Dig	10-5
Diameter	5 - 400 mm

CAPABILITIES


ASPHERE MANUFACTURING SPECIFICATIONS

Quality	Standard	Precision	High Precision
Diameter Tolerance	+/- 0.10 mm	+/- 0.05 mm	+/- 0.01 mm
CT Tolerance	+/- 0.10 mm	+/- 0.05 mm	+/- 0.02 mm
Power	5 fr	3 fr	1 fr
Irregularity (PV)	0.80 μm	0.50 μm	0.20 μm
Surface Roughness (Rq)	3 nm	1.5 nm	1 nm
Scratch-Dig	60-40	40-20	10-5




WINDOW MANUFACTURING SPECIFICATIONS

Quality	Standard	Precision	High Precision
Diameter Tolerance	+/- 0.10 mm	+/- 0.05 mm	+/- 0.01 mm
CT Tolerance	+/- 0.10 mm	+/- 0.05 mm	+/- 0.01 mm
Surface Accuracy	$\lambda/2$	$\lambda/10$	$\lambda/10$
Scratch-Dig	60-40	40-20	10-20
Parallelism	+/- 1 ' \prime	+/- 10 ' \prime	+/- 3 ' \prime

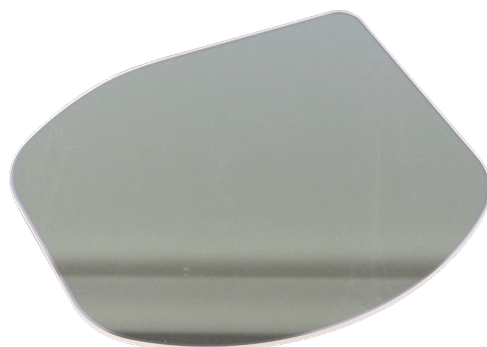

FREEFORM MANUFACTURING SPECIFICATIONS

Quality	Standard	Precision
Diameter Tolerance	+/- 0.10 mm	+/- 0.01 mm
CT Tolerance	+/- 0.10 mm	+/- 0.01 mm
RMS Irregularity (RMSi)	0.8 μm	0.05 μm
Surface Roughness Rq	2.0 nm	1.5 nm

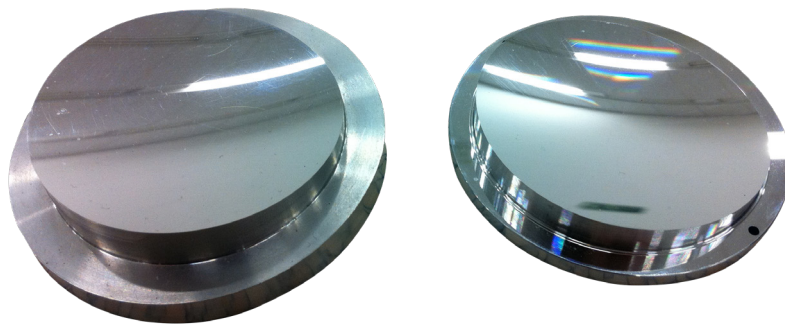


DOMES MANUFACTURING SPECIFICATIONS

Quality	Standard	Precision	High Precision
Diameter Tolerance	+/- 0.10 mm	+/- 0.05 mm	+/- 0.01 mm
CT Tolerance	+/- 0.15 mm	+/- 0.05 mm	+/- 0.01 mm
Power	5 fr	3 fr	1 fr
Scratch-Dig	80-50	60-40	20-10



THIN FILM COATINGS

UV VIS - AR COATING

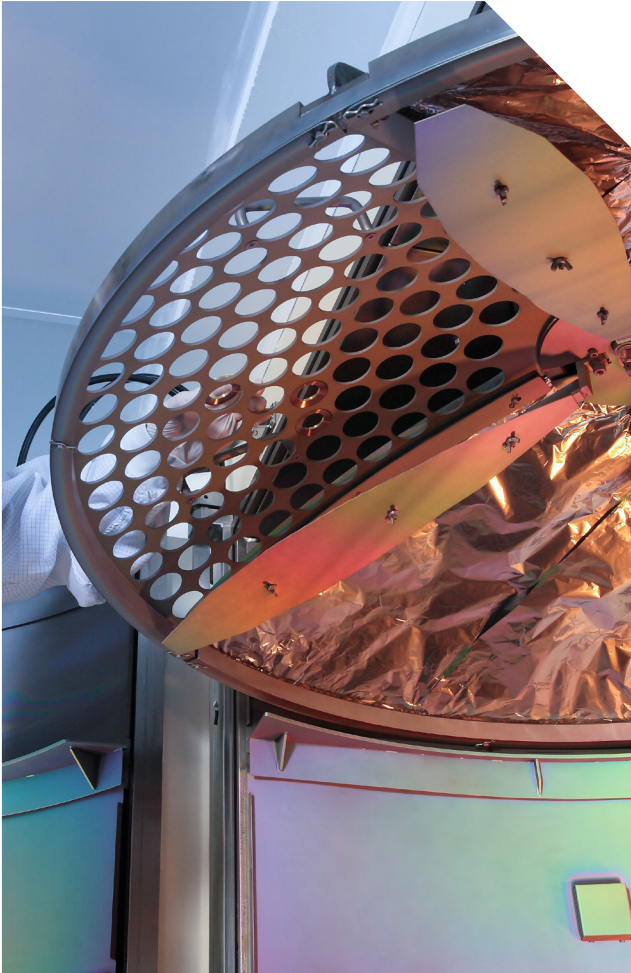

SHORT/LONG PASS WAVE COATING



Under 10,000 class clean room conditions, as a result of thin film coating processes by physical evaporation method on optical units, a Transmittance greater than 99.6% and reflection values greater than 98% are obtained. As a result of these high precision productions, all optical units such as lens, prism, window and filter in all regions from ultraviolet wavelength to infrared wavelength have been nationalized. Germanium, Silicon, Zinc Sulphide, Zinc Selenide, Sapphire, Calcium Fluoride, Fused Silica, Zerodur, Aluminium and many type of glasses can be coated and these materials can be in different geometries such as lens, flat optic, dome, prism and rode. Optical thin films can be coated using e-beam evaporation, thermal evaporation, Coatings can be designed and performed for anti-reflective, reflective, band pass filters, beam-splitters and short/long pass filters.

We provide :



- AR Coatings Transmittance Value For UV-VIS $T > 99,6\%$
- AR Coatings Transmittance Value For IR $T > 99,6\%$
- Metallic Mirrors Surface Reflectance $R > 98.0\%$
- Working Wavelength Range $200\text{nm} < \lambda < 13000\text{nm}$

After the processes are finished, the transmittance and reflection values of the optics are measured with the help of the spectrophotometer and FTIR according to the desired values in the documents. The deviation between all samples is 0.5%. After measurement; Tape, eraser and moisture tests are carried out in accordance with the quality standard. Optical elements that pass the test are shipped to the warehouse.

NIR - AR COATING




THE LASER DAMAGE THRESHOLD (LDT) COATING

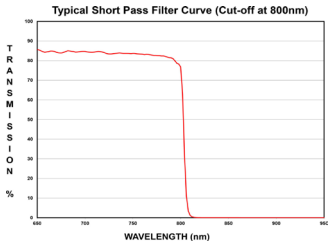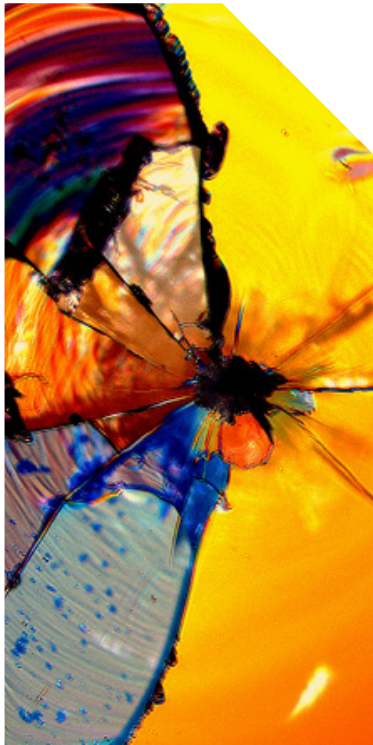

ShortPass Filtre

Short Pass Filter	AOI (Angle of Incidence)	Average Transmission (%)
400 - 900 λ	0° - 10°	98
950 - 1100 λ	0° - 10°	OD4



LongPass Filtre

Long Pass Filter	AOI (Angle of Incidence)	Average Transmission (%)
950 - 1100 λ	0° - 10°	OD4
1150 - 1700 λ	0° - 10°	98.5

CAPABILITIES

MWIR AR COATING ON SAPPHIRE WINDOWS





Multi-layer optical coating is deposited on Sapphire substrates up to 300 mm diameter to provide high transmittance and low reflectance at MWIR wavelength range together with high environmental durability.

AOI (Angle of Incidence)	% Average Transmission @3.6-4.9 μm
0°	96.8
20°	96.4
30°	95.6

AOI (Angle of Incidence)	% Average Transmission @3.6-4.9 μm
8°	0.7
30°	1.4

Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (240 Hours)
MIL-C-48497A 4.5.3.3	Moderate Abrasion

Measurements are taken from double side coated 1 mm thick witness sample.

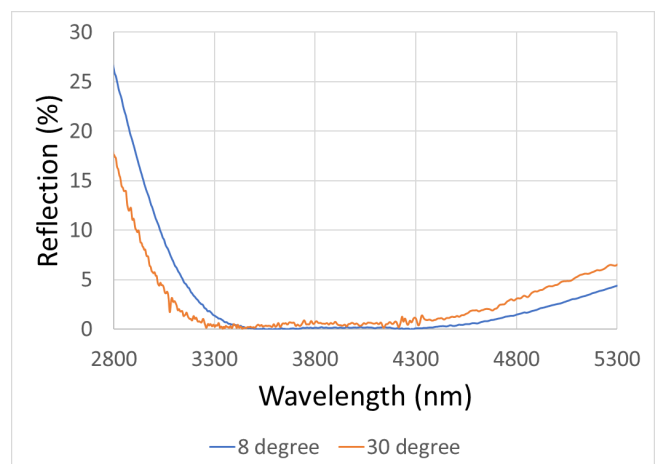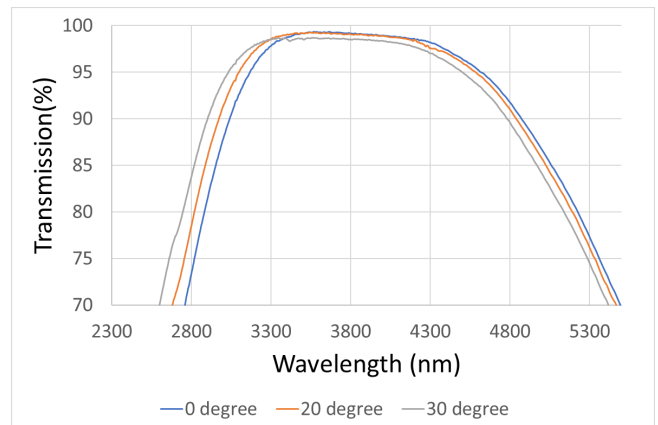

MWIR HYBRID DIAMOND-LIKE CARBON AR COATING ON SILICON WINDOWS



Multi-layer optical coating is deposited on Silicon substrates up to 300 mm diameter to provide high transmittance and low reflectance at MWIR range together with high environmental durability. Inner and outer sides are coated with different recipes to achieve the best performance.



AOI (Angle of Incidence)	% Average Transmission @3.6-4.9 μm
0°	98.5
20°	98.6
30°	98.4

AOI (Angle of Incidence)	% Average Transmission @3.6-4.9 μm
8°	0.5
30°	0.8

Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (240 Hours)
MIL-F-48616 4.6.10.1	Severe Abrasion
MIL-F-48616 4.6.10.4	Salt Spray

Measurements are taken from double side coated 1 mm thick witness sample.

www.aselsansivas.com

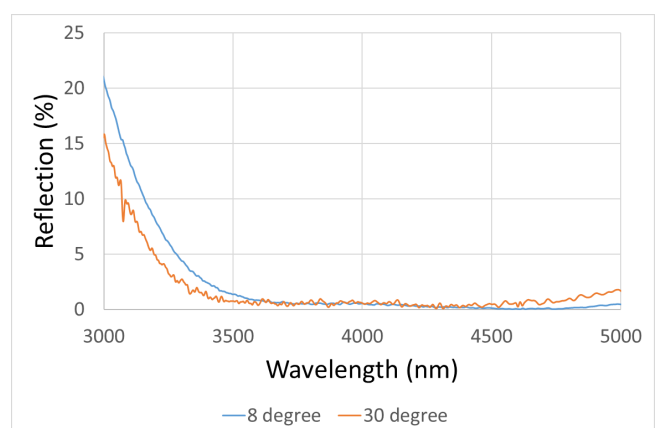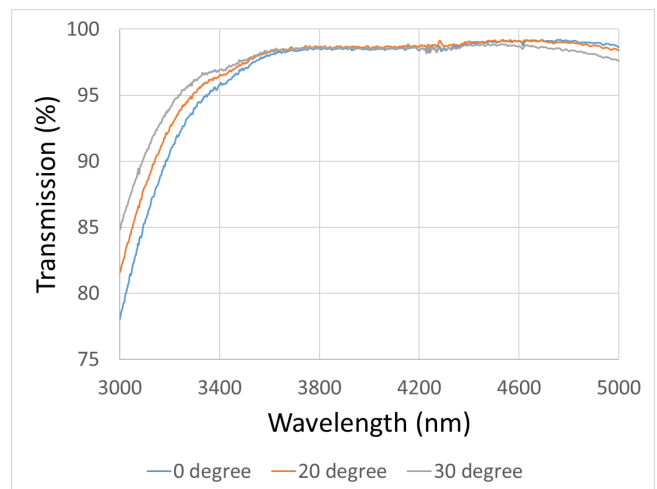

CAPABILITIES

MWIR DIAMOND-LIKE CARBON AR COATING ON GERMANIUM WINDOWS



Multi-layer optical coating is deposited on Germanium substrates up to 300 mm diameter to provide high transmittance and low reflectance at MWIR range together with high environmental durability. Inner and outer sides are coated with different recipes to achieve the best performance.



AOI (Angle of Incidence)	% Average Transmission @3.6-4.9 μm
0°	96.2
20°	96.0
30°	95.0

AOI (Angle of Incidence)	% Average Transmission @3.6-4.9 μm
8°	3.8
30°	5.2

Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (240 Hours)
MIL-F-48616 4.6.10.1	Severe Abrasion
MIL-F-48616 4.6.10.4	Salt Spray

Measurements are taken from double side coated 1 mm thick witness sample.

www.aselsansivas.com

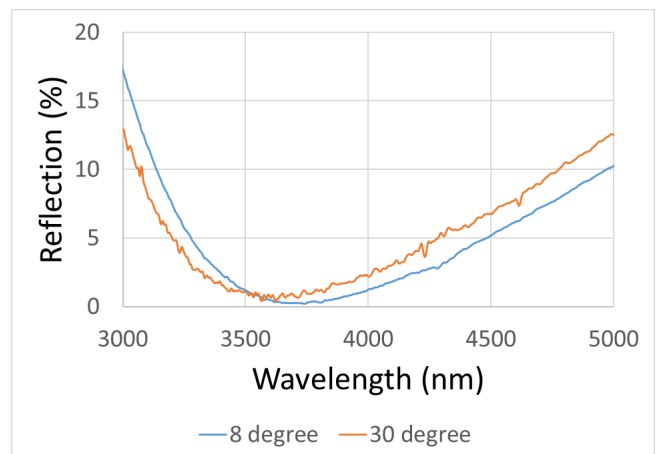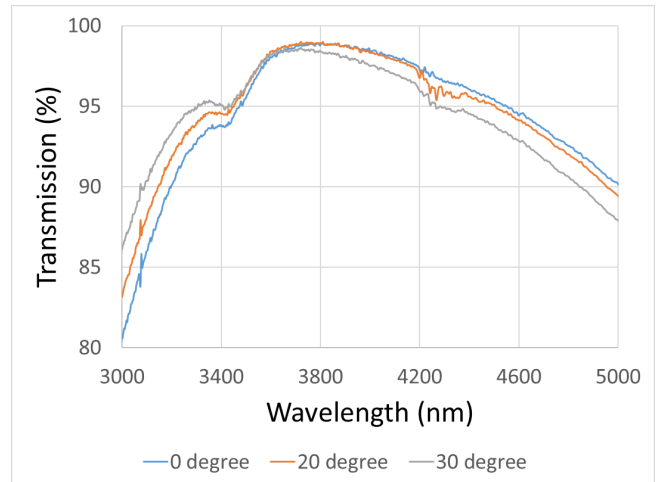

LWIR DIAMOND-LIKE CARBON AR COATING ON GERMANIUM WINDOWS



Multi-layer optical coating is deposited on Germanium substrates up to 300 mm diameter to provide high transmittance and low reflectance at LWIR range together with high environmental durability. Inner and outer sides are coated with different recipes to achieve the best performance.



AOI (Angle of Incidence)	% Average Transmission @8-12 μm
0°	91.2
20°	91.3
30°	91.1

AOI (Angle of Incidence)	% Average Transmission @8-12 μm
8°	2.3
30°	2.6

Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (240 Hours)
MIL-F-48616 4.6.10.1	Severe Abrasion
MIL-F-48616 4.6.10.4	Salt Spray

Measurements are taken from double side coated 1 mm thick witness sample.

www.aselsansivas.com

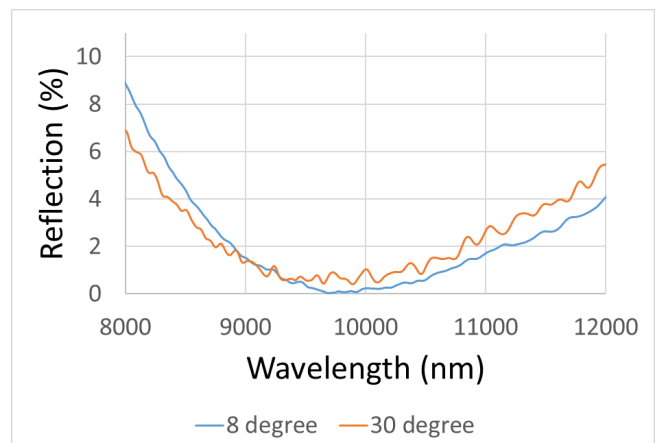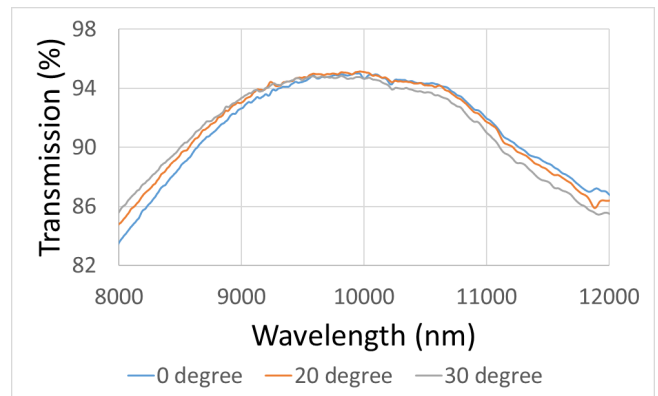

CAPABILITIES

MWIR AR COATING ON SILICON LENSES





Multi-layer optical coating is deposited on Silicon substrates up to 300 mm diameter to provide high transmittance and low reflectance at MWIR range.

AOI (Angle of Incidence)	% Average Transmission @3.25-4.95 μm
0°	99.0
20°	99.0
30°	98.7


AOI (Angle of Incidence)	% Average Transmission @3.25-4.95 μm
8°	0.6
30°	1.0

Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (24 Hours)
MIL-F-48616 4.6.10.1	Moderate Abrasion
MIL-F-48616 4.6.10.4	

Measurements are taken from double side coated 1 mm thick witness sample.

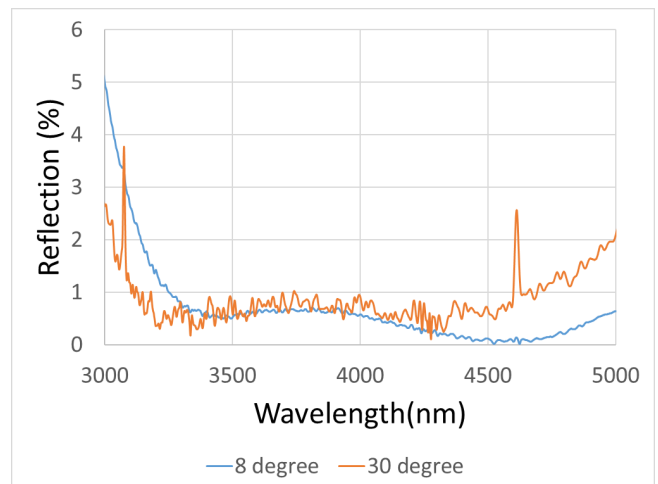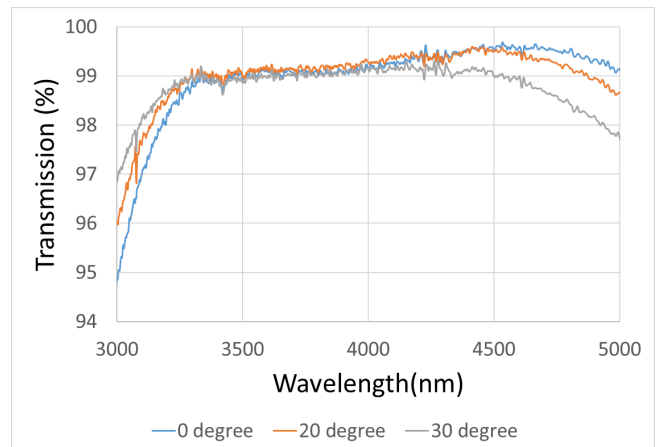

MWIR AR COATING ON GERMANIUM LENSES

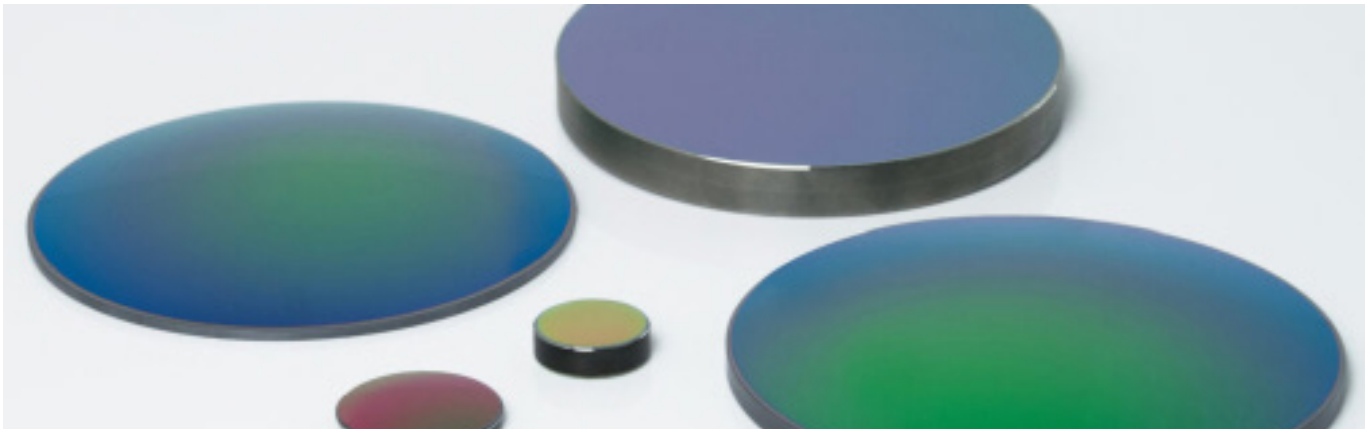



Multi-layer optical coating is deposited on Germanium lenses up to 300 mm diameter to provide high transmittance and low reflectance at MWIR range.

AOI (Angle of Incidence)	% Average Transmission @3.25-4.95 μm
0°	99.0
20°	98.9
30°	98.6

AOI (Angle of Incidence)	% Average Transmission @3.25-4.95 μm
8°	0.5
30°	0.9


Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (24 Hours)
MIL-F-48616 4.6.10.1	Moderate Abrasion
MIL-C-48497A 4.5.4.2	Solubility and Cleanability

Measurements are taken from double side coated 1 mm thick witness sample.

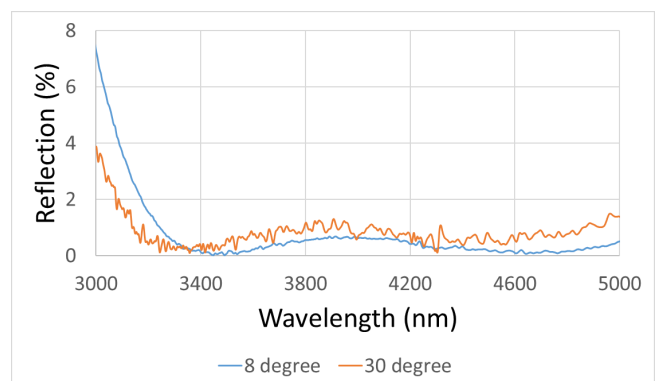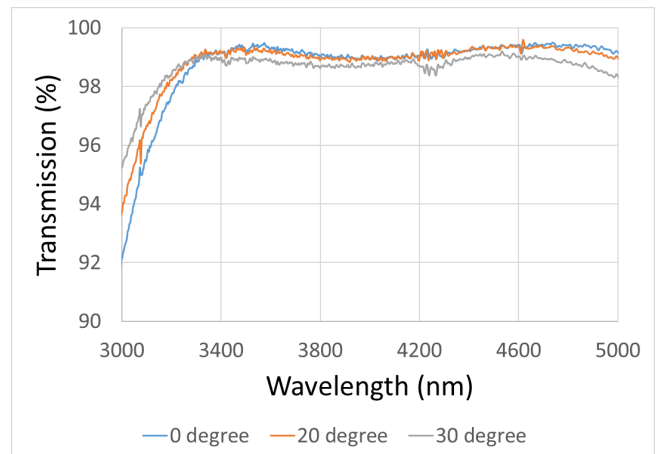

CAPABILITIES

LWIR AR COATING ON GERMANIUM LENSES

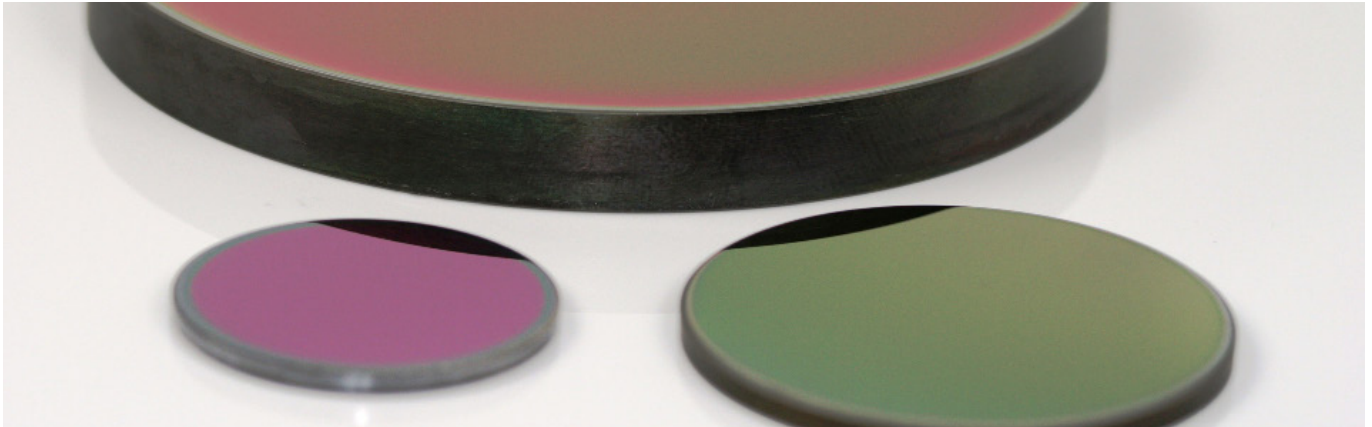



Multi-layer optical coating is deposited on Germanium lenses up to 300 mm diameter to provide high transmittance and low reflectance at LWIR range.

AOI (Angle of Incidence)	% Average Transmission @8-12 μm
0°	97.0
20°	97.7
30°	97.8

AOI (Angle of Incidence)	% Average Transmission @8-12 μm
8°	1.0
30°	1.2

Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (24 Hours)
MIL-F-48616 4.6.10.1	Moderate Abrasion
MIL-C-48497A 4.5.4.2	Solubility and Cleanability

Measurements are taken from double side coated 1 mm thick witness sample.

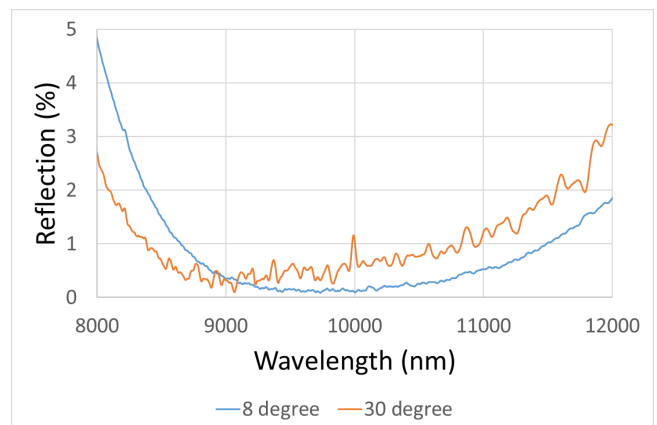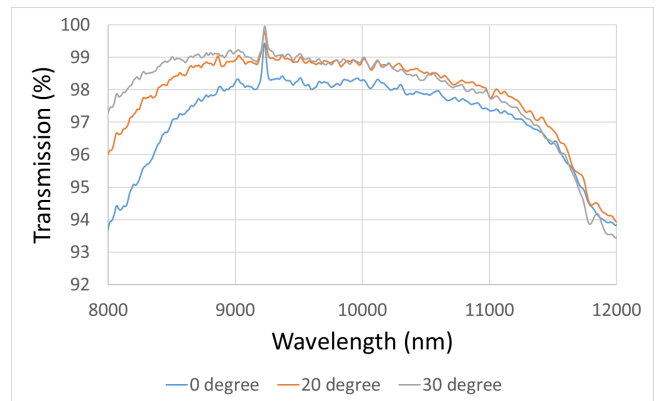

MWIR AR COATING ON ZINC SULPHIDE LENSES





Multi-layer optical coating is deposited on Zinc Sulphide up to 300 mm diameter lenses to provide high transmittance and low reflectance at MWIR range.

AOI (Angle of Incidence)	% Average Transmission @3.6-4.9 μm
0°	98.0
20°	98.1
30°	97.8

AOI (Angle of Incidence)	% Average Transmission @3.6-4.9 μm
8°	0.6
30°	0.7

Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (24 Hours)
MIL-F-48616 4.6.10.1	Moderate Abrasion
MIL-C-48497A 4.5.4.2	Solubility and Cleanability


Measurements are taken from double side coated 1 mm thick witness sample.

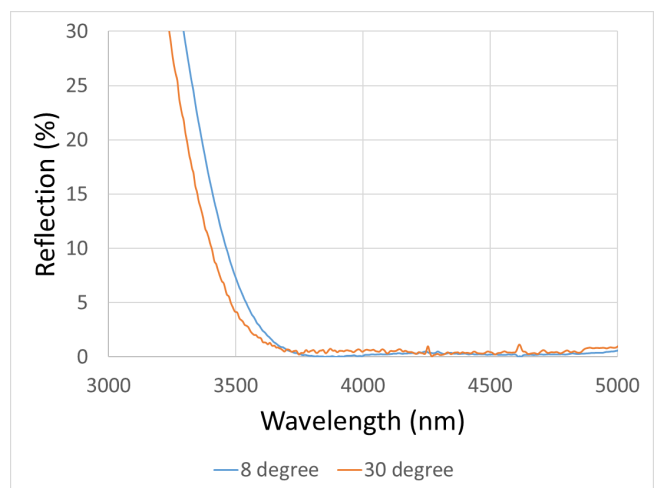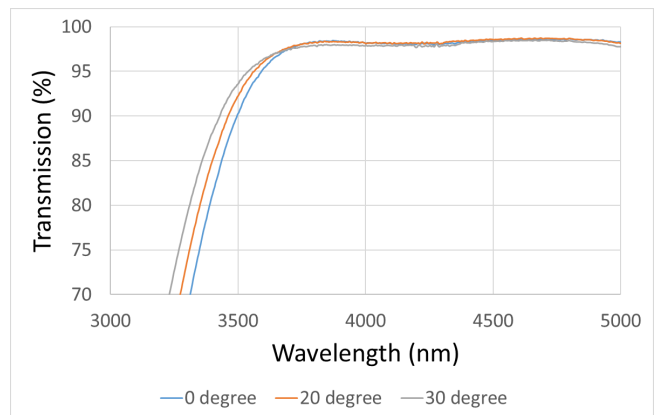

CAPABILITIES


OPTICAL THIN FILM COATINGS FOR IR DOMES

Domes have high radius of curvature, therefore providing the same optical performance at every part of the dome is challenging. ASELSAN can make coating with good uniformity and high optical transmittance on dome substrates. Also, dome optics are located at the outside of the electro-optical system and therefore high environmental durability should be achieved.

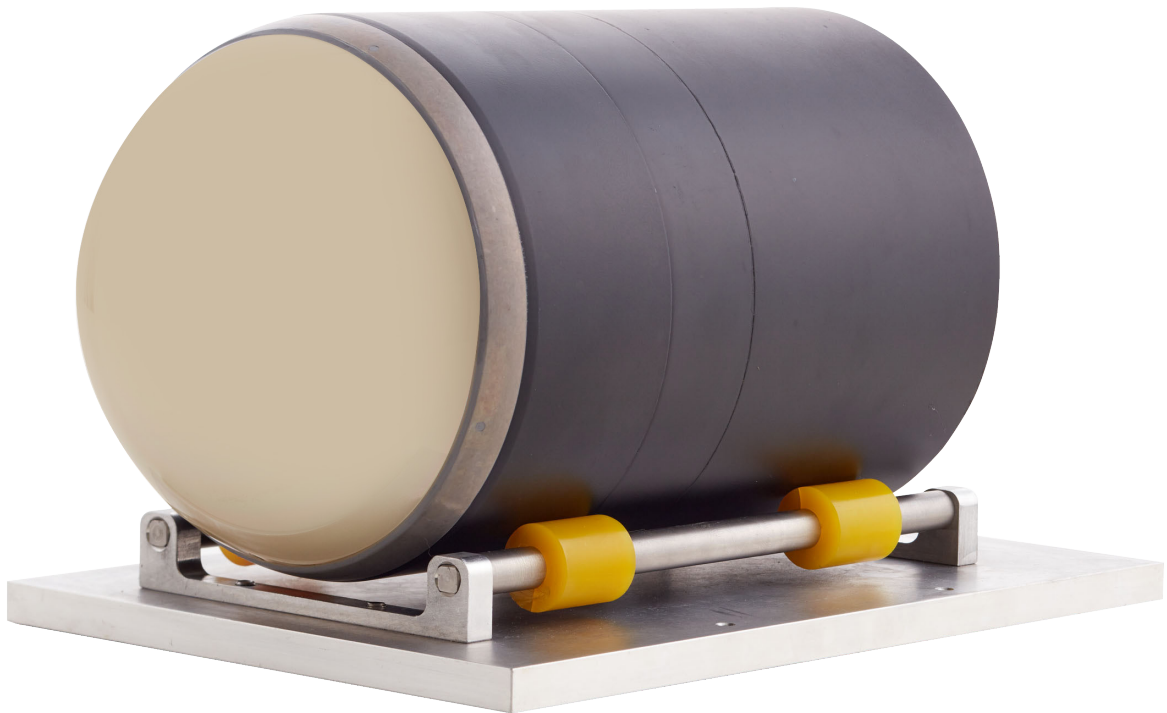

Optical Thin Film Coating on a Typical IIR Seeker

LWIR AR COATING ON ZINC SULPHIDE DOMES

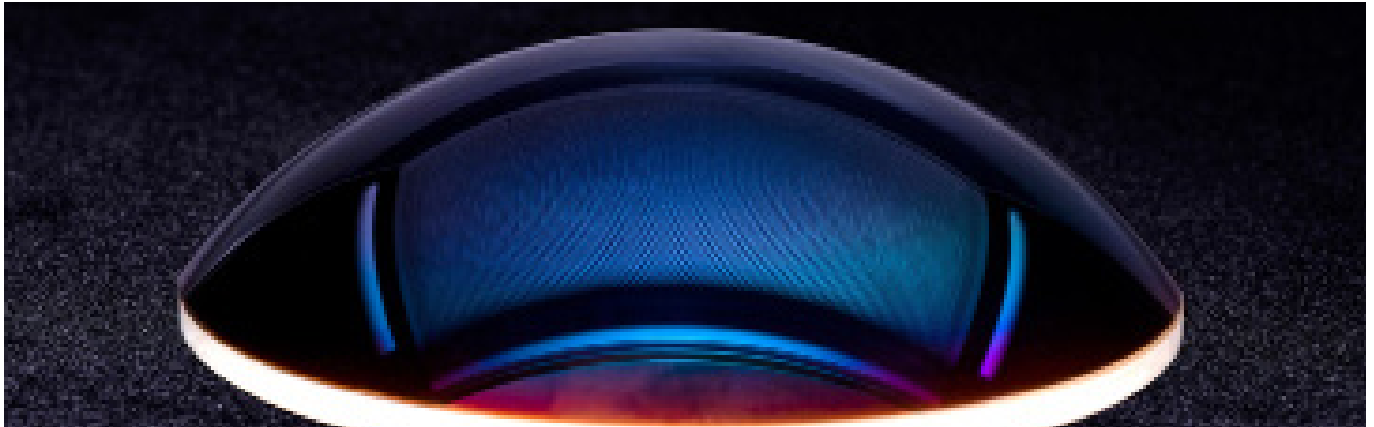


Multi-layer optical coating is deposited on Zinc Sulphide domes up to 200 mm diameter to provide high transmittance and low reflectance at LWIR range together with high environmental durability.

AOI (Angle of Incidence)	% Average Transmission @8-12 μm
0°	93.1
20°	93.0
30°	92.6

Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (240 Hours)
MIL-F-48616 4.5.3.3	Moderate Abrasion

Measurements are taken from double side coated 1 mm thick witness sample.

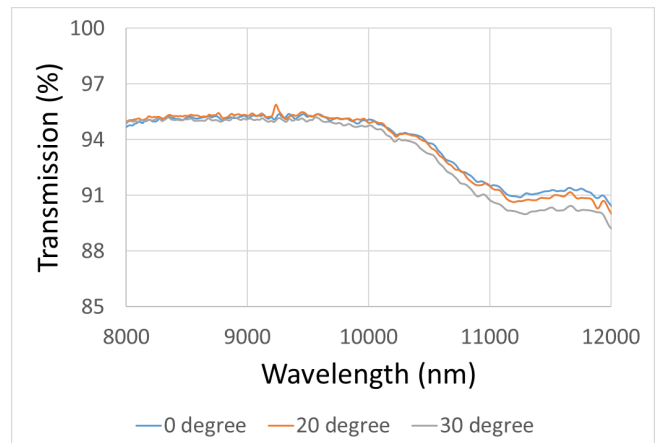

CAPABILITIES

VIS-SWIR-MWIR AR COATING ON SAPPHIRE WINDOWS

Multi-layer optical coating is deposited on Sapphire substrates up to 500 mm diameter to provide high transmittance and low reflectance at VIS, SWIR, LWIR bands.


AOI (Angle of Incidence)	% Average Transmission @420-700 nm	% Average Transmission @900-1700 nm	% Average Transmission @3.6-4.9 μm
0°	95.5	93.5	93.8
20°	95.9	93.2	93.6
30°	96.0	93.0	93.2

AOI (Angle of Incidence)	% Average Reflection @420-700 nm	% Average Reflection @900-1700 nm	% Average Reflection @3.6-4.9 μm
8°	3.9	6.0	3.4
30°	3.4	6.3	3.8







Environmental Tests

MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (24 Hours)
MIL-F-48616 4.5.3.3	Moderate Abrasion

Measurements are taken from double side coated 1 mm thick witness sample.

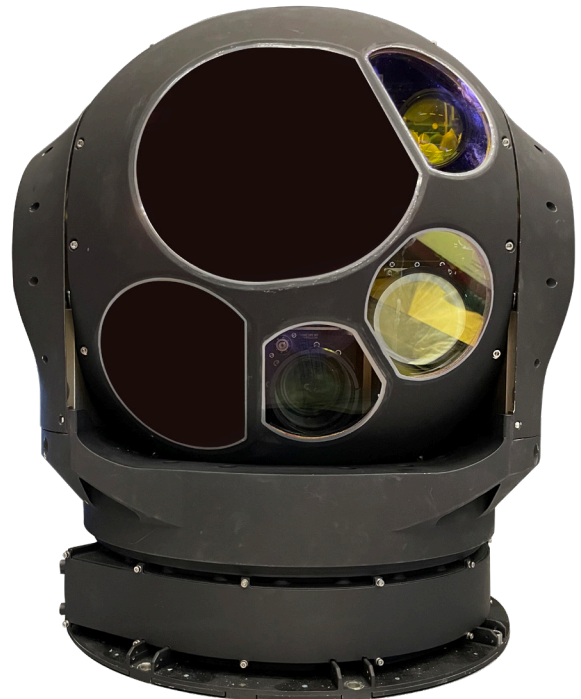

VIS-SWIR-MWIR AR COATING ON SAPPHIRE WINDOWS

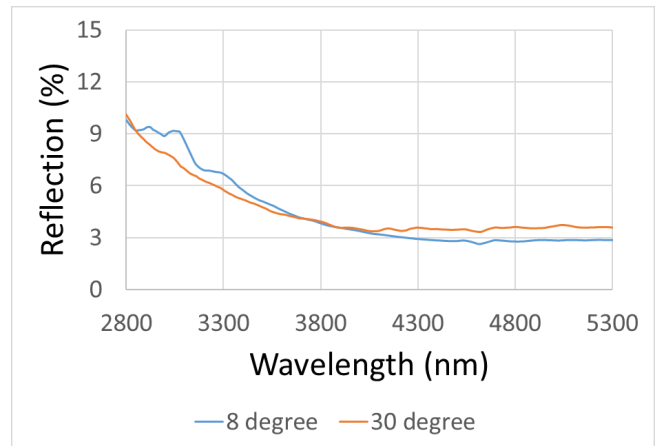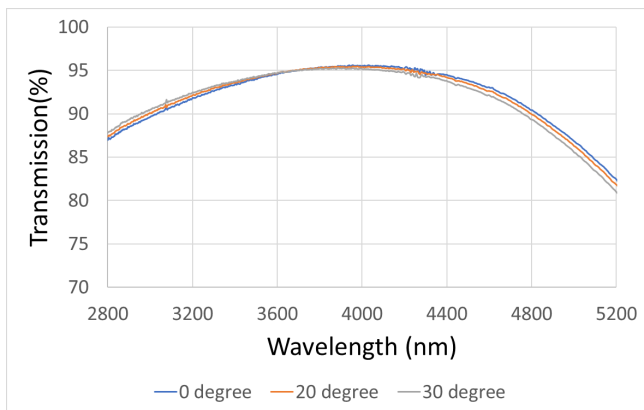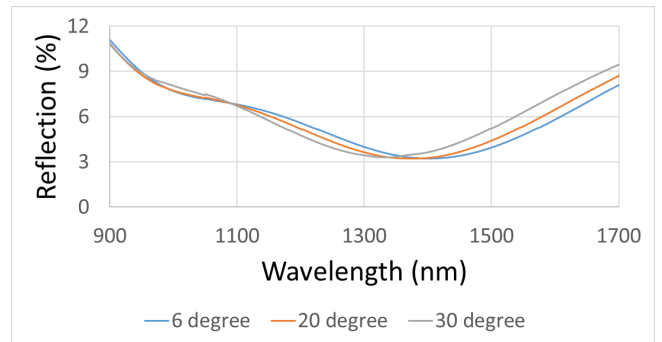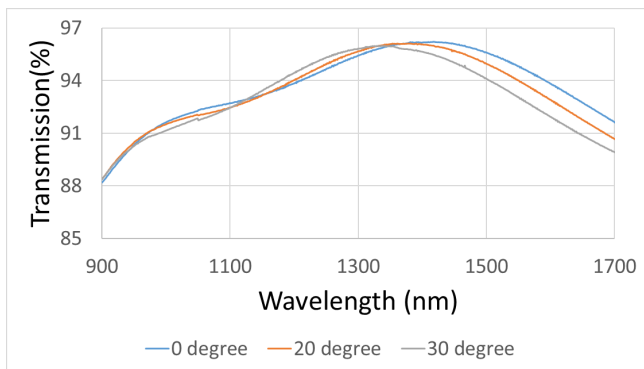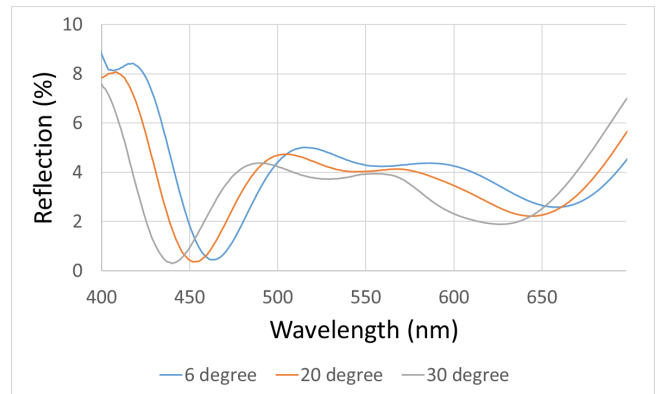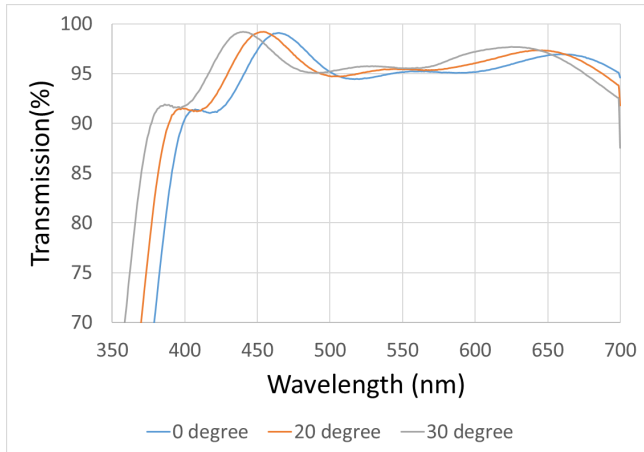

CAPABILITIES


OPTICAL THIN FILM COATINGS FOR MIRRORS

Mirror coatings can be performed in both dielectric multilayers and metallic layers. ASELSAN has the capability to make mirrors with both techniques. ASELSAN metallic mirrors show high scratch resistance, low tarnishing and high environmental durability. Therefore, wide wavelength range reflective coatings can be created.



Zerodur Mirror with High Reflectance Coating

VIS-LWIR HIGH REFLECTANCE COATING ON ALUMINIUM MIRROR

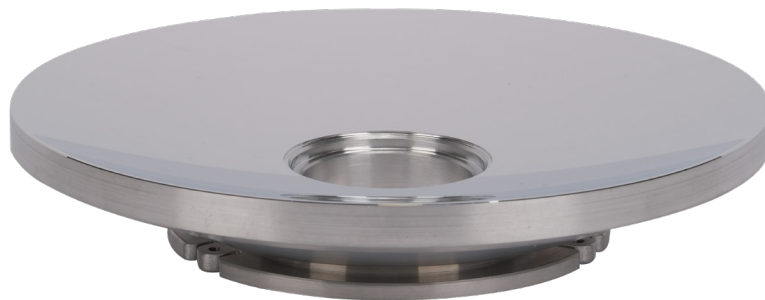


Metallic mirror coating is deposited on Aluminium substrates up to 250 mm diameter to provide high reflectance over a wide wavelength range. Coating shows high adherence, high scratch resistance and low tarnishing.

AOI (Angle of Incidence)	% Average Reflection @0.42-0.7 μm	% Average Reflection @0.7-1.7 μm	% Average Reflection @3.6-4.9 μm	% Average Reflection @8-12 μm
0° - 20°	>97.5	>97.5	>99	>99

Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (24 Hours)
MIL-F-48616 4.5.3.3	Moderate Abrasion

Measurements are taken from double side coated 1 mm thick witness sample.

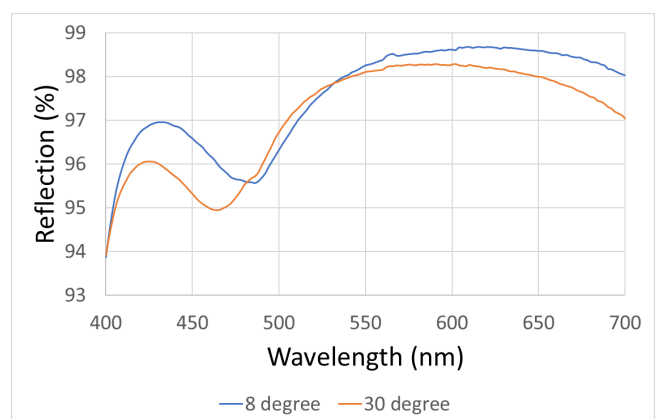

CAPABILITIES

OPTICAL THIN FILM COATINGS FOR FILTER APPLICATIONS

Optical filters are used in many electro-optic systems to block the undesired range of energy spectrum. ASELSAN has the capability to design and manufacture optical filters for different kinds of applications. Filters can be produced from UV to MWIR range. Band pass filters can be produced between 10 to 100 nm Full Width Half Maximum.



Optical Thin Film Coating Used on ASELSAN's Missile Warning Systems




LASER BAND PASS FILTER COATING ON GLASS



Multi-layer optical coating is deposited on glass substrates to provide required Full Width Half Maximum (FWHM), center wavelength, blocking range and level. FWHM is around 20nm and optical density is bigger than 4 between 400-1200nm which outside the transmitted range. Transmittance is higher than 90%.


Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (24 Hours)
MIL-F-48616 4.5.3.3	Moderate Abrasion

Measurements are taken from double side coated 1 mm thick witness sample.

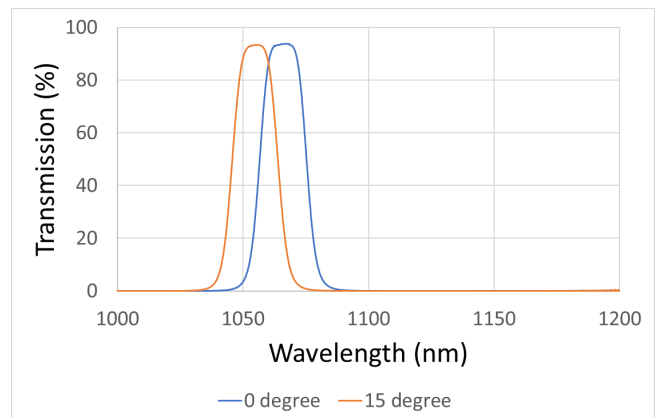

CAPABILITIES

DUAL LASER BAND PASS FILTER COATING ON GLASS

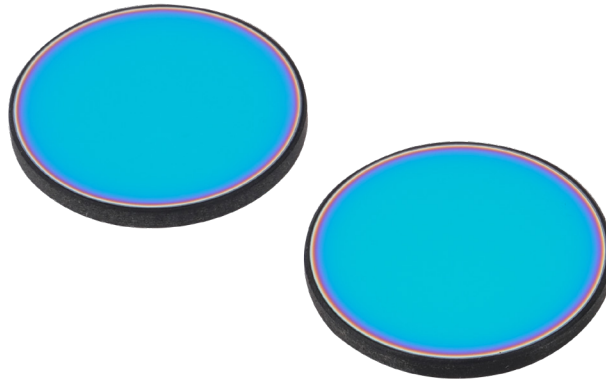


Multi-layer optical coating is deposited on glass substrates to provide required Full Width Half Maximum (FWHM), center wavelength, blocking range and level for dual laser wavelengths. FWHM is around 20nm at 1064nm and 50nm at 1572nm and optical density is bigger than 3 between 400-1700nm which outside the transmitted range. Transmittance is higher than 90% at both wavelengths.


Environmental Tests

MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (24 Hours)
MIL-F-48616 4.5.3.3	Moderate Abrasion

Measurements are taken from double side coated 1 mm thick witness sample.

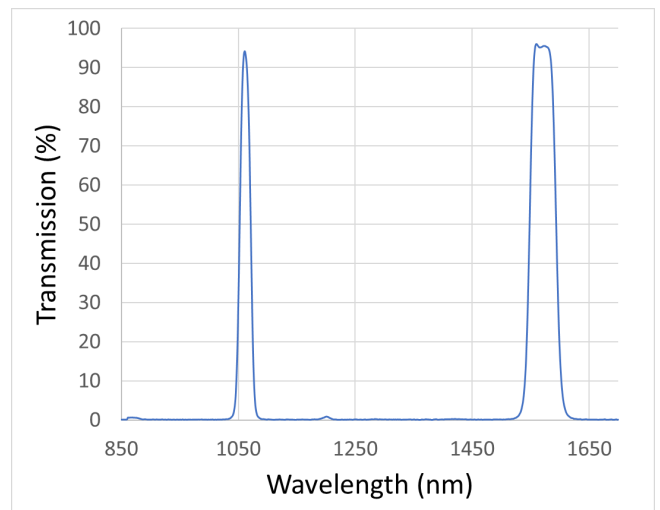



DUAL LASER BAND PASS FILTER COATING ON GLASS

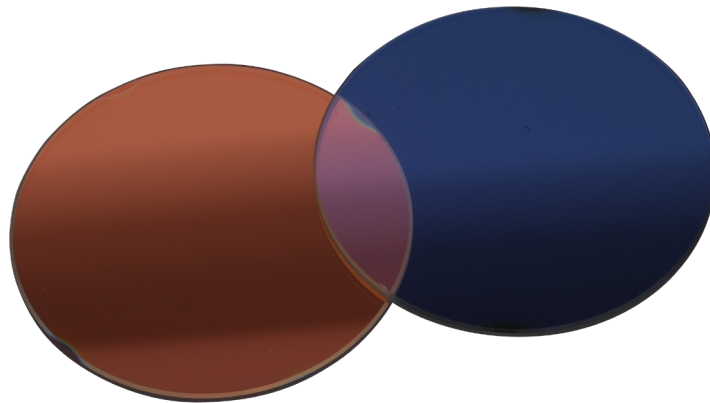

Multi-layer optical coating is deposited on glass substrates to provide high transmittance at UV range and blocking at visible range. Transmittance at UV wavelengths is higher than 90% and optical density is higher than 6 at blocking range.


Environmental Tests	
MIL-C-48497A 4.5.3.1	Adhesion
MIL-C-48497A 4.5.4.1	Temperature Cycle
MIL-C-48497A 4.5.3.2	Humidity (24 Hours)
MIL-F-48616 4.5.3.3	Moderate Abrasion

Measurements are taken from double side coated 1 mm thick witness sample.

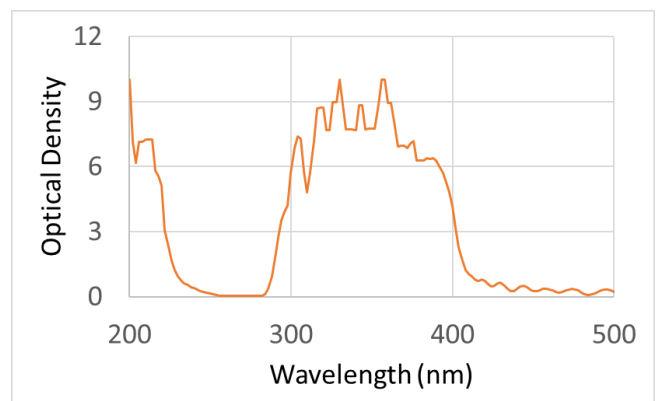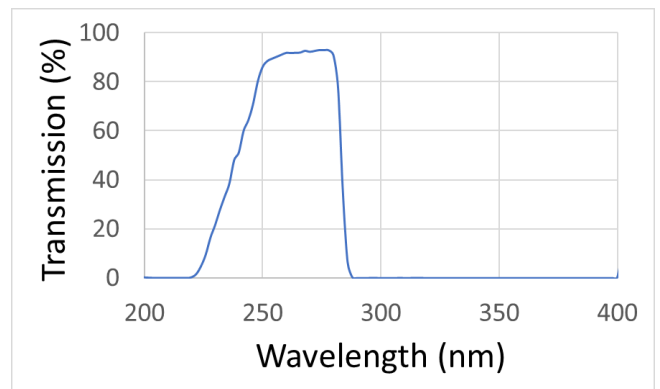

PATTERN PRINTING

MASKLESS PHOTOLITHOGRAPHY

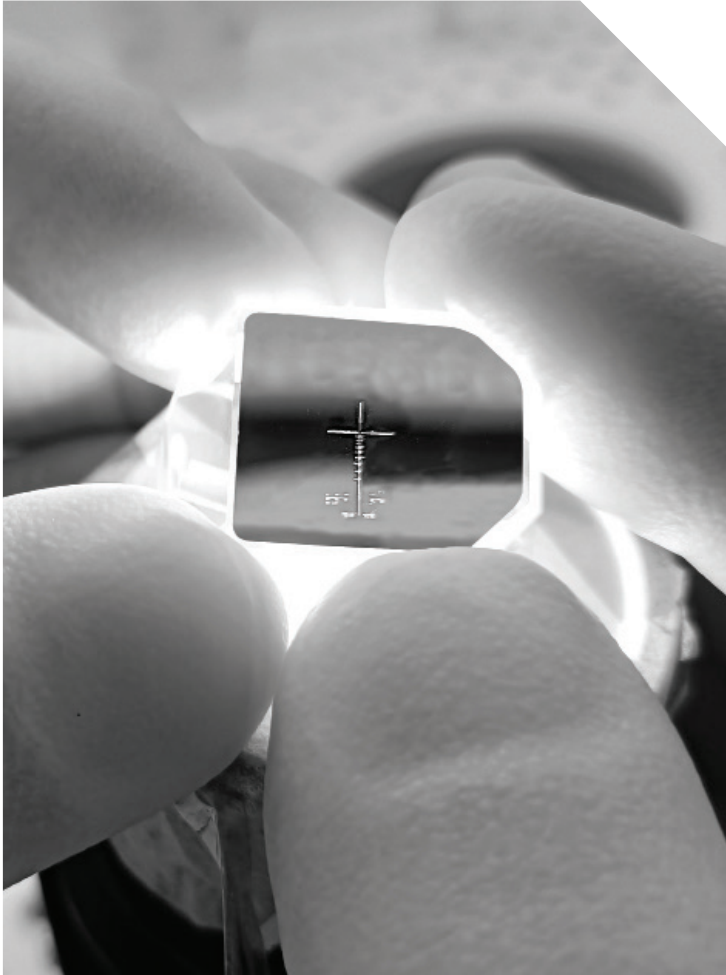


MASS PRODUCTION




With the maskless photolithography method, patterns are printed on various surfaces up to 15cm x 15cm with a resolution of 1 micron. The maskless photolithography device is capable of multiple processing at one time. Compared to traditional lithography methods, the processing time is quite short thanks to its optical elements.

- Compatible with many photoresists thanks to 405 nm and 385 nm UV light source,
- Patterning without mask, without mask cost thanks to smart filter technology,
- Layered patterning ability,
- Fully automatic, wide (15cm x 15cm) stage with movement capability in X, Y, Z and T axes for patterning of large substrates

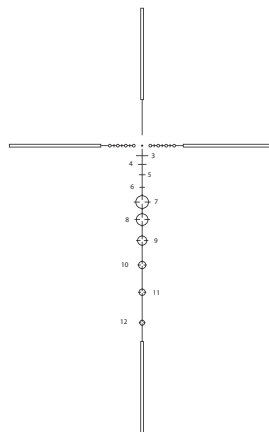

Pattern

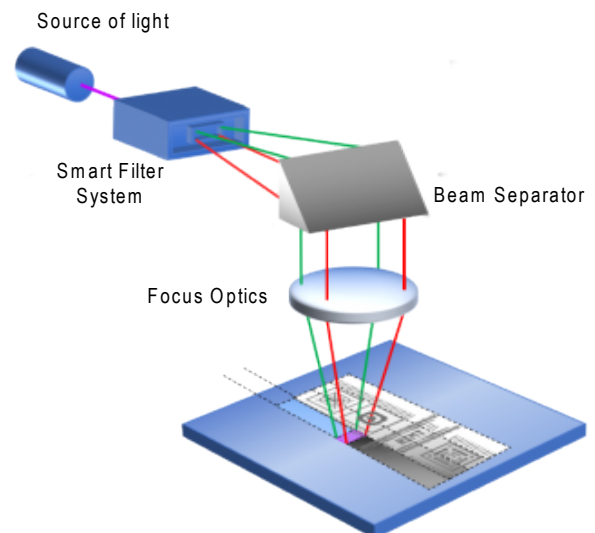

SINGLE POINT DIAMOND TURNING (SPDT)



SPDT



Single-Point Diamond Turning (SPDT) new generation lathes produce high-end optical surface finishes and consistent performance in plastic and metals which producing precision optical components including off-axis parabolic (OAP) mirrors, off-axis elliptical (OAE) mirrors, spherical and aspheric lenses, and flatwork. The SPDT process is also used to machine the optical surface on the inserts used in the molding process.


Aselsan Sivas offers build-to-print or custom capabilities to meet your specific application needs whether standard or custom, our expert optical design and diamond turning staff can develop customized solutions incorporating custom sizes and shapes, a variety of metal mirror coatings, or other modifications.

The SPDT process can fabricate small quantities of custom optical prototypes prior to production molding the optics.

Max. diameter (mm)	440
Surface roughness (nm)	1 Sa
Form accuracy (μm)	0,1 PV
Materials	Plastics, Nickel, Brass, Copper, Aluminum, Germanium, Silicone, ZnSe And many other materials.
Surfaces	Aspheric, Spheres, Diffractive, Conic, Fresnel, Toroidal, Array, Plano, Prism
Support for Customers	Modelling of Surface, Lens Designs, Simulotion of optics
Performing Tests	Interferometers and Profilometers measure surface figure.

PLASTIC INJECTION

POLYCARBONATE LENS


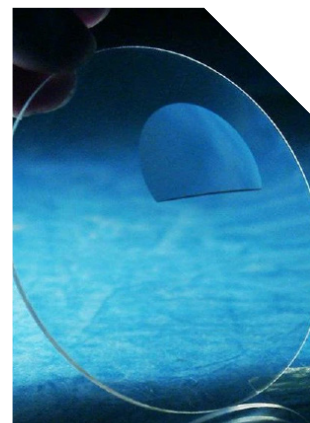


The use of precision polymer optics is becoming an increasing necessity today as products demand sophisticated light handling components to achieve desired results. Polymer optics can be thought of as an important enabling technology allowing the successful development of many types of devices. Key advantages that polymer optics have competing glass solutions include lighter weight; the ability to integrate mechanical and optical features; and the ability to reproduce aspheric, freeform, and other complex geometric surfaces. The unique nature of thermoplastics and of the injection molding process itself demands a disciplined approach during all phases of manufacturing, from component

design through prototyping and finally to production. The best outcomes are achieved when the design team (usually made up of optical and mechanical designers) understands the manufacturing process and works closely with a manufacturer who specializes in this field.

SYSTEM DESIGN

OPTICAL DESIGN OPTOMECHANICAL DESIGN

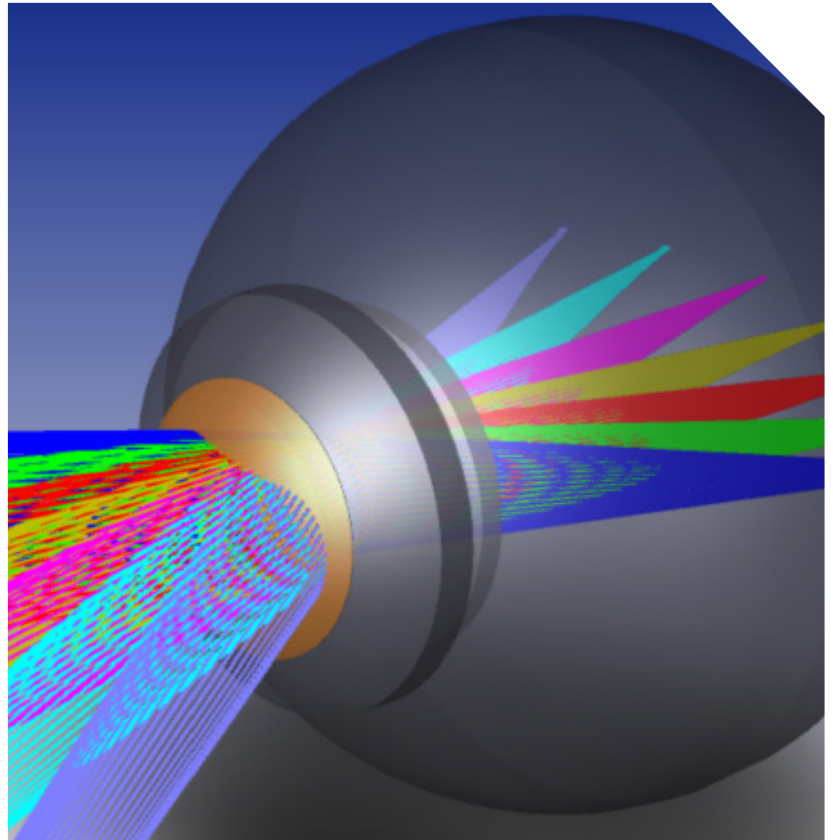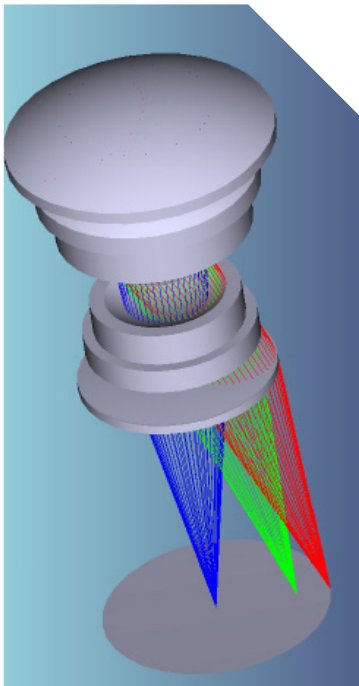


We offer ODM optical design service. Many of our customers need us to provide design support and manufacturing of lenses while retaining their own branding. We offer our customers the best suitable reflective or refractive optical design and engineering projects, and lead them through to a finished optical component or opto-mechanical/electro-optical assembly. Our perspective in optical design and opto-mechanical engineering is on manufacturability, and we support that expertise to customer projects from the very first review of the requirement. If you need optical components, rapid prototyping, electro-optical or opto-mechanical manufacturing, our experienced team is near you. Projects are only limited by your imagination. Reverse engineering is also one of our business to perform amendments on designs and etc.


When designing optical components, it's not enough to only make the prototype work. Every optical solution should do more than just meet the specifications and function—it has to meet feasibility criteria for production quantity. When you select a company for optical design, it pays to work with someone who understands not only design but manufacturability. Aselsan Sivas is great in optical lens designs, but most important, we are an optical manufacturer. Our engineers use the right lens design process with the knowledge of manufacturing



process and limitations and cost.

Are you an OEM in need of optics design assistance? We can help you optimize your lens design for manufacturability (DFM) and make your lens product more feasible and affordable for production quantities. Our DFM input will cover material selection, tolerance and performance analysis, etc. You'll have a design product with clear specifications and low manufacturing cost for meeting your customer's objectives without over-engineering.

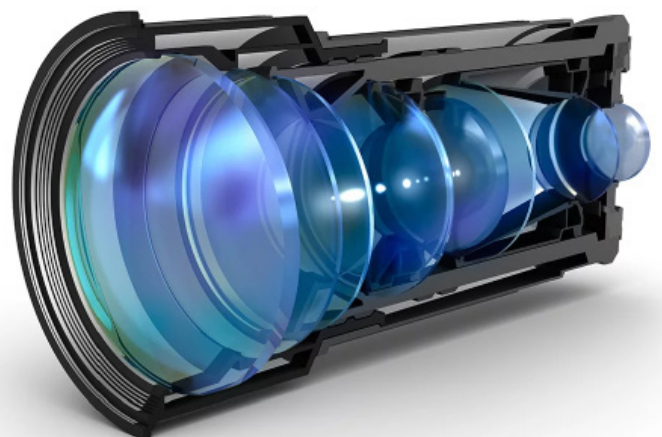

OPTICAL MEASUREMENT

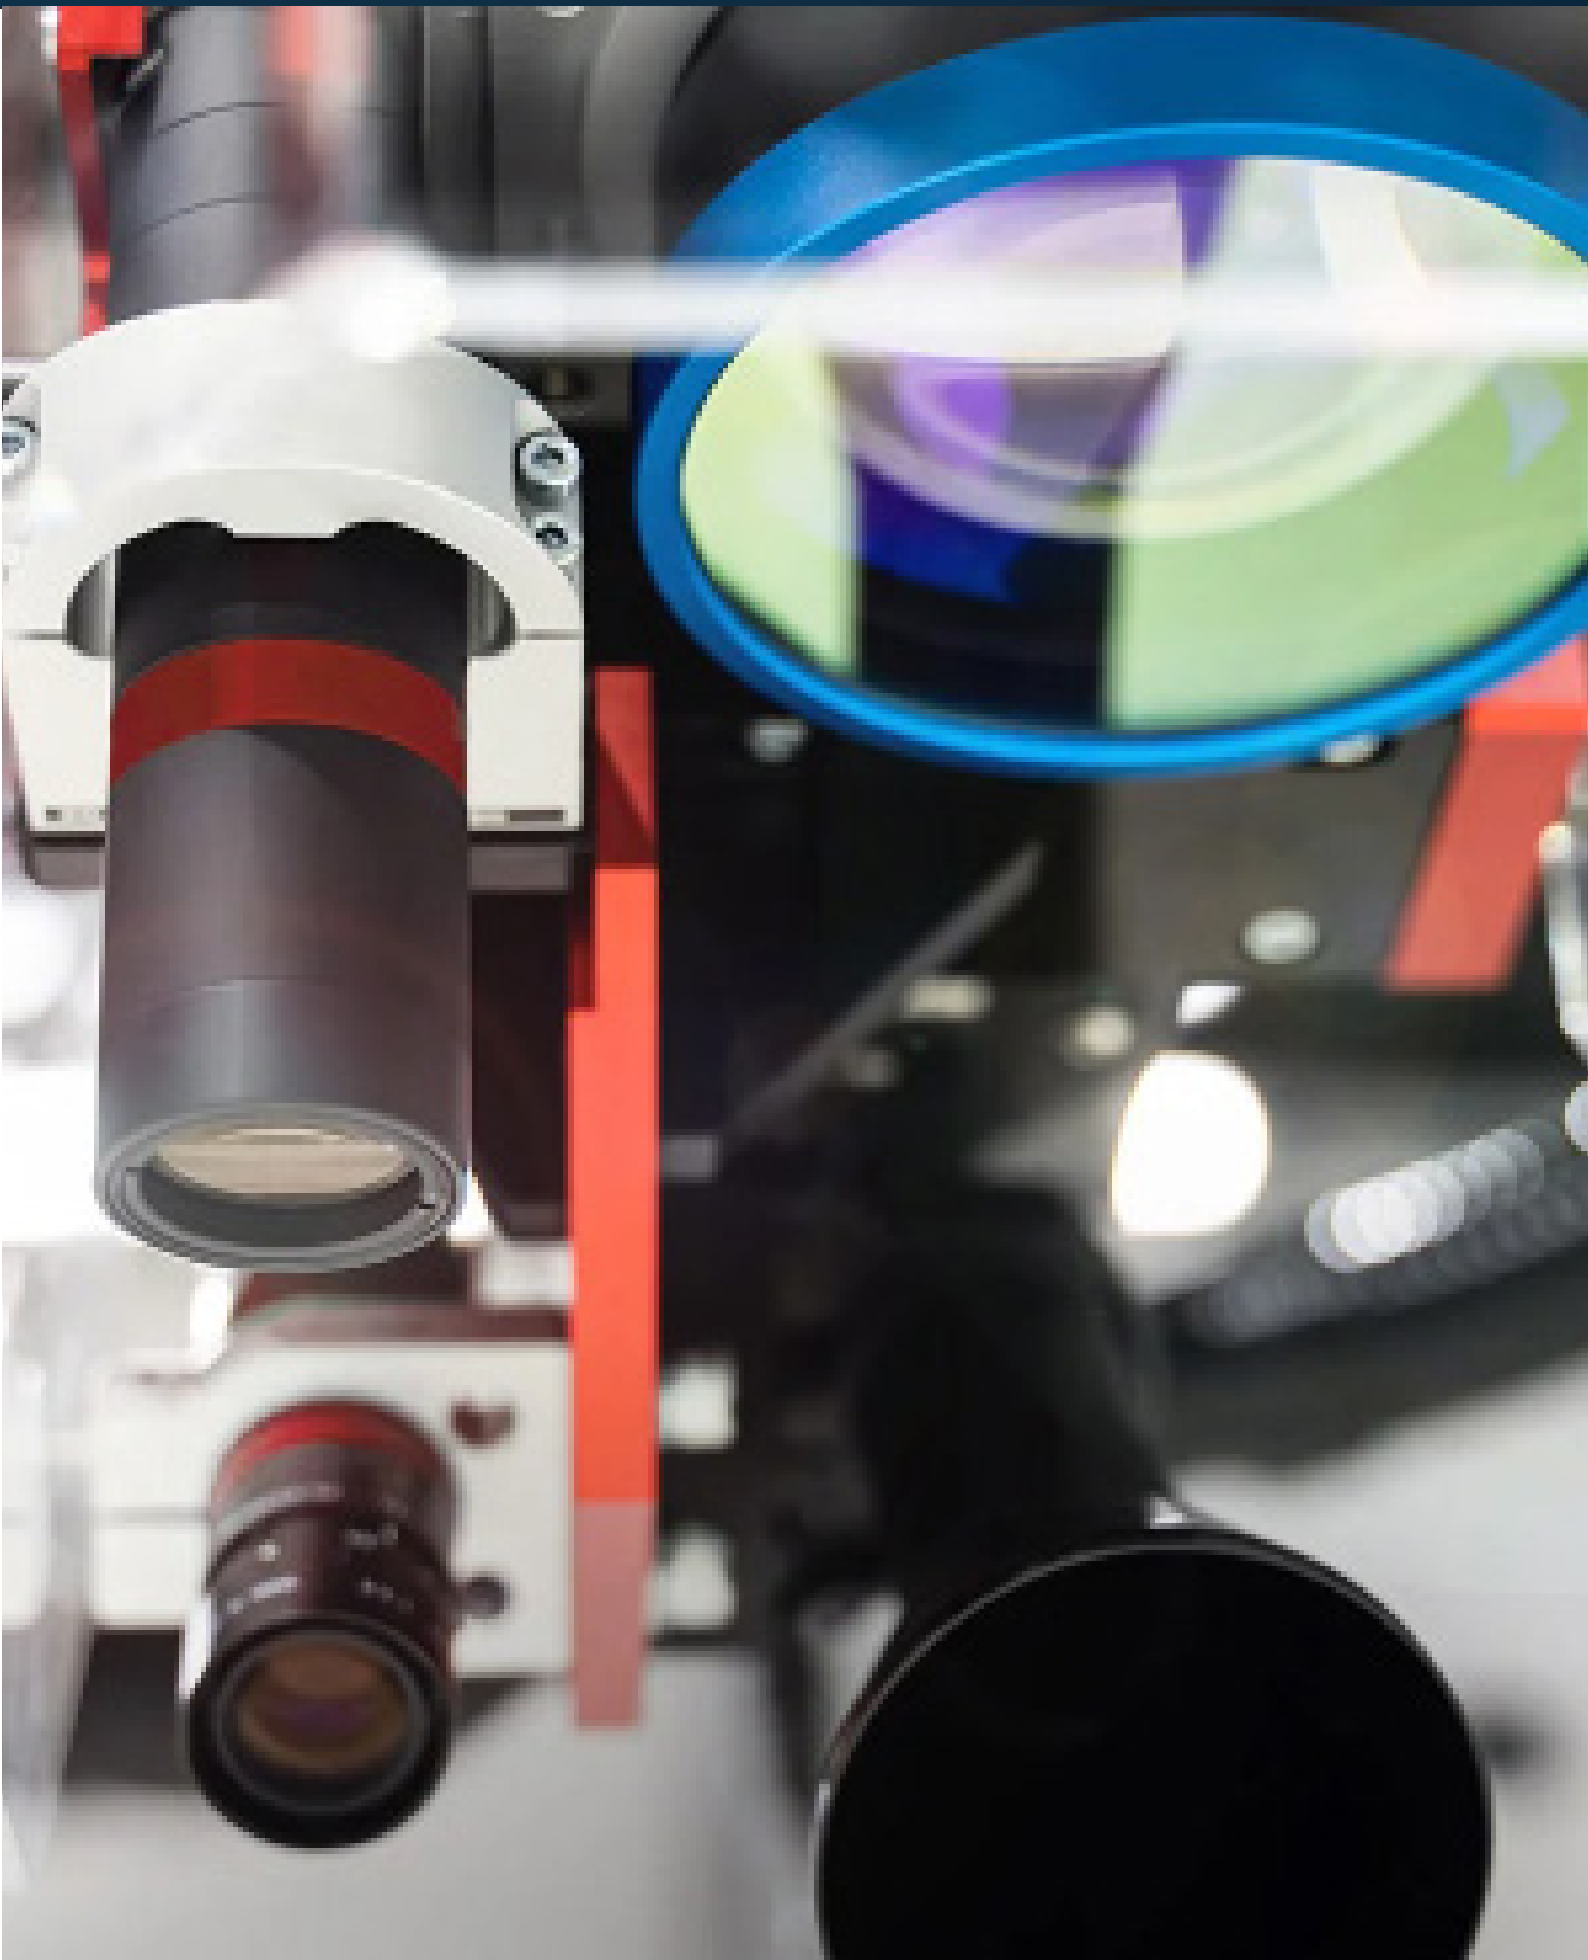

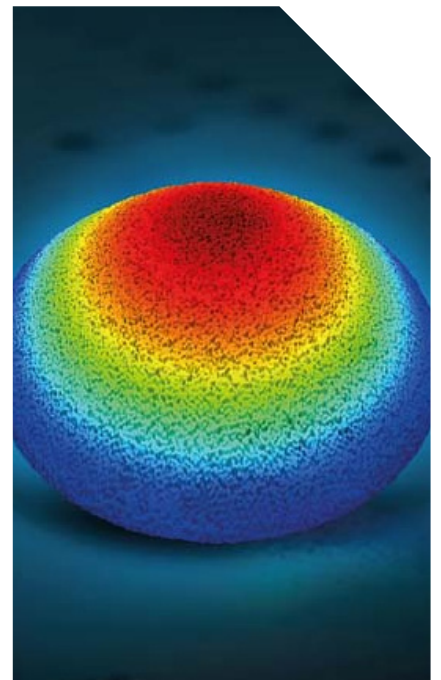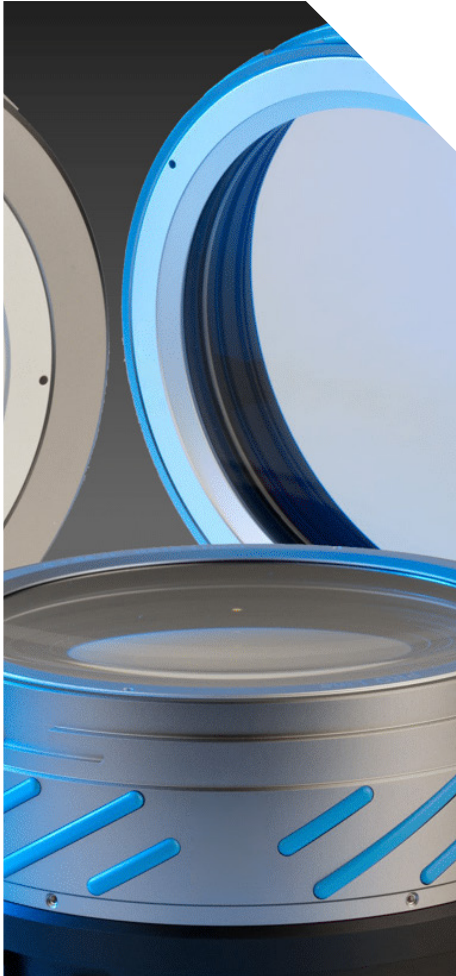

These optical inspection machines are built on a platform with at least three axes and at least one objective lens. Using a computer to automatically detect features and calculate measurements from those detected features, vision measuring machines are most often computer-controlled although manual models do exist.

In addition to a machine frame or base with at least three axes and an objective lens, all vision measuring machines have an image detector and a computer. The frame holds the part being measured along with the lens and detector. The detector itself interprets light gathered by the objective lens and transforms it into an electrical signal that the computer then uses to calculate dimensions based on measured edges (e.g. distances, diameters, etc.). The detector is either a charge-coupled device (CCD) or a complementary metal oxide semiconductor (CMOS).

- High resolution surface profilometer
- Laser interferometers
- Spherometers
- Goniometers and digital protractors
- Center thickness measuring systems
- Off-center measurement systems
- Spectrofotometer



CONTINUOUS ZOOM MOTORIZED OBJECTIVE

22-275 MM F/5.5, CONTINUOUS ZOOM, MOTORIZED FOCUS MWIR OBJECTIVE



Optical Parameters

Focal Length 22-275mm

F/# 5.5

Transmission ~76%

Horizontal Field of View(HFOV) 25° - 2°

WFOV(22MM)

HFOV[deg] 320x240 480x384 640x512

30μ 25

20μ 16.67 25

15μ 12.50 18.5 25

NFOV(275MM)

HFOV[deg] 320x240 480x384 640x512

30μ 2

20μ 1.33 2

15μ 1 1.5 2

Mechanical Properties

Focus Mechanism Motorized adjustable

Focus Range 50m to ∞

Weight 330gr

Outer Dimensions Ø70 - 74mm

Environmental Tests

Operating Temperature -32°C +50°C


Storage Temperature -45°C +60°C

Sealing -

Shock-Vibration -

Front Lens Coating Complaint to Military Specifications

15-300 MM F/4, CONTINUOUS ZOOM, MOTORIZED FOCUS MWIR OBJECTIVE

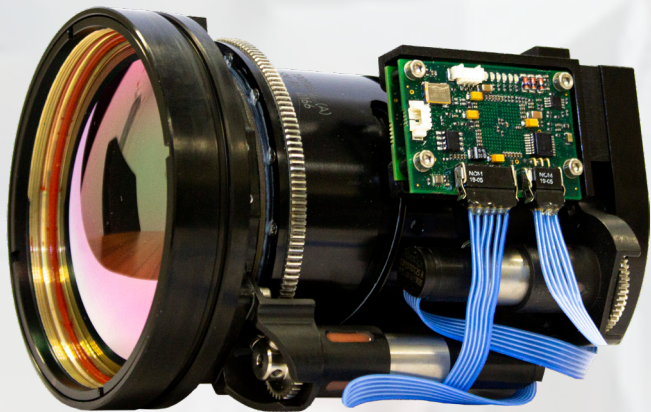

Optical Parameters

Focal Length 15-300mm

F/# 4

Transmission ~71%

Horizontal Field of View(HFOV) 35° - 1.8°

WFOV(15MM)

HFOV[deg] 320x240 480x384 640x512

30μ 35.4

20μ 24 35.4

15μ 18.1 27 35.4

NFOV(300MM)

HFOV[deg] 320x240 480x384 640x512

30μ 1.8

20μ 1.2 1.8

15μ 0.9 1.3 1.8

Mechanical Properties

Focus Mechanism Motorized adjustable

Focus Range 50m to ∞

Weight 1250 gr

Outer Dimensions Ø70 - 74mm

Environmental Tests

Operating Temperature -32°C +50°C

Storage Temperature -45°C +60°C

Sealing IP 67-Front Lens

Shock-Vibration High Durability

Front Lens Coating Complaint to Military Specifications

CONTINUOUS ZOOM MOTORIZED OBJECTIVE

25-150MM F/1.4, MOTORIZED FOCUS, CONTINUOUS ZOOM LWIR OBJECTIVE



Optical Parameters

Focal Length	25-150mm
F/#	1.4
Transmission	~75%
Horizontal Field of	24.15° - 3.8°
View(HFOV)	

NFOV(150mm)

HFOV[deg]	160x120	320x240	384x288	640x480
50μ	3.05			
38μ	2.31			
35μ	2.13			
30μ	1.82	3.67		
28μ	1.70	3.42		
25μ	1.52	.053	.67	
17μ	1.03	2.07	2.04	4.15

NFOV(25mm)

HFOV[deg]	160x120	320x240	384x288	640x480
50μ	17.83			
38μ	13.55			
35μ	12.48			
30μ	10.69	1.4		
28μ	9.98	19.97		
25μ	8.91	17.83	1.4	
17μ	6.06	12.12	4.55	24.3

Mechanical Properties

Focus Mechanism	Motorized adjustable
Focus Range	50m to ∞ (NFOV), 5m to ∞ (WFOV)
Weight	1250 gr
Outer Dimensions	max Ø125 - 135mm

Environmental Tests

Operating Temperature	-32°C +50°C
Storage Temperature	-45°C +60°C
Sealing	IP 67-Front Lens
Shock-Vibration	DLC Coating
Front Lens Coating	Complaint to Military Specifications

18.6-343 MM F/4.7-5.7, MOTORIZED FOCUS, CONT. ZOOM SWIR OBJECTIVE



Optical Parameters

Focal Length	2.9-608.6mm
F/#	4.7-5.7
Transmission	~72%
Horizontal Field of View(HFOV)	27.29° - 1.6°

Mechanical Properties

Focus Mechanism	Motorized adjustable
Focus Range	100m to ∞ (NFOV) 5m to ∞ (WFOV)
Weight	1900 gr
Outer Dimensions	max Ø76 - 130mm

WFOV(25MM)

HFOV[deg]	640x512
15μ	27.29

NFOV(150MM)

HFOV[deg]	640x512
15μ	1.6

Environmental Tests

Operating Temperature	-32°C +50°C
Storage Temperature	-45°C +60°C
Sealing	IP 67-Front Lens
Shock-Vibration	High Durability
Front Lens Coating	Compliant to Military Specifications

WHY CHOOSE ?

Building a long and successful partnership with our clients is key to what we do. We pride ourselves on our customer support and deliver and maintain long term relationships with our customers. The initial order is just the first step in our new business relationship.

Our experienced team of account managers all hold industry related degrees and are on hand to provide free technical advice via online chat, email or telephone. We have multilingual staff speaking languages and their experience will help guide you through the supply chain process, and they ensure your project is consistently delivered on time and to budget.



Our fully equipped metrology facility, staffed by a dedicated team of trained metrology technicians, the team ensure every product we send out the door meets our customer's demanding specifications. Even if the parts are a basic stock component or a high volume order of precision optics, you can rest assured that your order will be fully qualified and ready to use, straight out of the box. Our quality assurance and metrology teams undergo regular training and review to ensure they are familiar of the latest advances in industry technology.

STANDARDS AND QUALITY



Aselsan Sivas provide ISO9001:2015 for Quality Management Systems and ISO14001:2004 for Environmental Management. Our 2022 review was passed with 100% conformity thanks to the dedication of our ISO staff and we look forward to maintaining that record in the years to come. Our certification can be found on our website or by contacting our team directly.

QUALITY

Cleaning

Optics are cleaned carefully to minimize damage. Suitable cleaning solutions are used to prevent damage to delicate materials or coatings. Dilute pH neutral acetone is used for cleaning uncoated optical products. Glass cleaning solution is used for optics at risk of damage from acetone. Air blowers and brushes are used for materials unsuitable for solvent cleaning. Laminar flow cabinet is used for assembling and cleaning optical assemblies.

Inspection

All parts control 100% quality assurance checks by experienced optical inspection team. Staff undergo regular training to comply with ISO standards. Parts are inspected against surface quality requirements using appropriate equipment. Scratch/dig requirements are tested against standards. Parts are checked for material imperfections.

Packaging

Optics are carefully packed to prevent damage during delivery. Filters and similar products are vacuum-packed to eliminate humidity degradation. Non-filter products are wrapped in tissue paper and placed in non-abrasive bags. Sharp-edged components are wrapped in soft foam to prevent chipping. Packaging is done immediately after cleaning to prevent contamination. Traceability is maintained, and any issues are addressed promptly.

Delivery

Metrology test data is included with the order. Aselsan Sivas has good relationships with logistics companies for optimal pricing and delivery. Timely delivery is ensured to meet customer schedules.

aselsansivas

Aselsan Sivas is a subsidiary of ASELSAN A.Ş.

Ahmet Turan Gazi OSB Mah 3.Kısım 6.Cadde 16.Sok No:4 Sivas / Türkiye
T: +90 (346) 218 20 20